Industrial Computing
Products and Services

Panel PC's

Industrial PC's

SBC's

Industrial Displays

Electronic Design

dsl
Embedding the future

Why Choose DSL?

- ✓ Lifetime technical support
- ✓ Fully customisable products
- ✓ Product branding (bezel colours + company logos)
- ✓ Free pre-installation of OS and your software

Our Services

- ✓ Electronic Design
- ✓ Production Management
- ✓ Assembly and test
- ✓ Bespoke BIOS creation

sales@dsl-ltd.co.uk

or call us on +44 (0)1462 675530

DSL Ltd. | 4 Aylesford Court, Works Road, Letchworth Garden City, Hertfordshire, SG6 1LP

APC-3x84/3x85 Panel PC
User Manual

Release Date	Revision
July 2010	V1.0

Warning!

This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions manual, it may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.

Electric Shock Hazard – Do not operate the machine with its back cover removed. There are dangerous high voltages inside.

Table of Contents

Warning!……2
Disclaimer……2

Chapter 1 Getting Started

1.1 Features……5
1.2 Specifications……5
1.3 Brief Description ……7
1.4 Chassis Dimensions……8

Chapter 2 Installation

2.1 Unfastening of Back Cover……12
2.2 Removal of Back Cover……12
2.3 Fastening of HDD……12
2.4 Installation of HDD……12
2.5 Connecting HDD Cable……13

Chapter 3 Mainboard

3.1 Mainboard Specifications……14
3.2 Installation memory……20
3.3 Connector and Jumpers……21

Chapter 4 AMI BIOS Setup

4.1 Operations after POST Screen……30
4.2 Standard CMOS Features……32
4.3 Advanced BIOS Features……35
4.4 Advanced Chipset Features Setup…… 38
4.5 Integrated Peripherals…… 42
4.6 Power Managements Setup…… 47
4.7 PnP/PCI Configurations Setup…… 51

4.8 PC Health Status..... 53
4.9 Load Fail-Safe/Optimized Defaults..... 54
4.10 Set Administrator/User Password..... 56
4.11 Save & Exit Setup..... 57

Chapter 5 Software

5.1 Intel Chipset Drivers 60
5.2 Intel Graphics Media Accelerator Driver.....63
5.3 RealTek Gigabit LAN Driver.....67
5.4 Realtek HD Driver Installations.....70

Chapter 6 Touch Driver Installation

6.1 Windows 2000/XP Driver Installation for Controller Board.....73
6.2 Configuring PenMount Windows 2000/XP Driver.....77
6.3 Uninstall PenMount Windows 2000/XP Driver.....84

Appendix

VESA Mounting.....86

Figures

Figure 1.1: Front View 7
Figure 1.2: Rear View.....7
Figure 1.3: Chassis Dimensions.....8
Figure 3.1: Board Layout.....14
Figure A: VESA Mounting.....86

Chapter 1

1.1 Features

- Ultra slim semi-sealed Panel PC
- Fanless thermal solution
- Intel® Atom™ N270 1.6GHz processor, FSB 533MHz
- 1 x 200-pin SO-DIMM socket, up to 2GB DDR2 533MHz SDRAM
- 1 x STAT 2.5” HDD Space
- NEMA 4/IP65 compliant front panel
- VESA Mounting support
- Resistive touch screen (Optional)
- DC 11~32V wide range power input

1.2 Specifications

System

System	
Processor	Intel® Atom™ N270 1.6GHz, FSB 533MHz
System Memory	1 x 200-pin SO-DIMM socket, support 533MHz up to 2GB SDRAM
System Chipset	Intel® 945GSE + ICH7M
External I/O Port	4 x USB ports, 2 x RJ-45 ports, 1 x COM (RS-232) , 1 x VGA port, 1 x MIC, 1 x Line-Out, Line –in, 1 x DC power input **(APC-3284/3285)** 4 x USB ports, 2 x RJ-45 ports, 2 x COM (COM 2 for RS-232/422/485) , 1 x VGA port, 1 x MIC, 1 x Line-Out, Line –in, 1 x ATX Power, 1 x DC power input **(APC-3584/3585, APC-3784/3785, APC-3984/3985)**
Solid Storage Disk	1 x 2.5” SATA HDD or 1 x External CF slot **(APC-3284/3285)** 1 x 2.5” SATA HDD and 1 x Internal CF slot **(APC-3584/3585, APC-3784/3785, APC-3984/3985)**
OS Support	Windows® CE 5.0, XP Pro, XP embedded
LCD	
Display Type	TFT-LCD
Max. Resolution	800x600 **(APC-3284/3285)** 1024x768 **(APC-3584/3585)** 1280x1024 **(APC-3784-3785, APC-3984/3985)**
Max. Color	262K (**APC-3284/3285, APC-3584/3585)**

	16.2M **(APC-3784/3785, APC-3984/3985)**
Luminance (cd/m^2)	350 (cd/m^2) **(APC-3284/3285, APC-3584/3585)** 300 (cd/m^2) **(APC-3784-3785, APC-3984/3985)**
View Angle	H:140° / V:110° **(APC-3284/3285)** H:140° / V:100° **(APC-3584/3585)** H:170° / V:160° **(APC-3784-3785, APC-3984/398)**
Backlight Lifetime	40,000hrs **(APC-3284/3285)** 50,000hrs **(APC-3584/3585, APC-3784/3785, APC-3984/3985)**
Touch Screen	
Type	Analog resistive
Light Transmission	80%
Power Supply	
Power Input	DC 11~32V
Mechanical	
Construction	Stainless Steel Enclosure **(APC-3x84)** Black color of Steel Enclosure **(APC-3x85)**
IP Rating	IP 65 on Front Panel
Mounting	VESA 75x75 **(APC-3285/3285,APC-3584/3585,APC-3784/3785)** VESA 100x100 **(APC-3984/3985)**
Dimension	330 (W) x260 (H) x59 (D) mm **(APC-3284/3285)** 398 (W) x316 (H) x67 (D) mm **(APC-3584/3585)** 432 (W) x358 (H) x69 (D) mm **(APC-3784-3785)** 470 (W) x387(H) x 72 (D) mm **(APC-3984/3985)**
Net Weight	7.9kg **(APC-3284/3285)** 9.6kg **(APC-3584/3585)** 12kg **(APC-3784-3785)** 13kg **(APC-3984/3985)**
Environmental	
Operating Temperature	0~50 ° C
Storage Temperature	-20~60 ° C
Storage Humidity	10~90% @40℃ non-condensing
Certificate	Meet CE/FCC Class A

1.3 Brief Description of the APC-3x8 / 3x85

Out of the ordinary, the chassis of the APC-3x84/3x85 is made of stainless steel or painting metal with an ultra slim profile. It is built in the Intel® Intel® Atom™ N270 1.6GHz, FSB 533MHz, it is fanless. The model comes with a 12.1" ~19" inch high-brightness TFT LCD display, a NEMA 4/IP65 compliant front panel, space for one 2.5-inch HDD, an optional resistive touch screen, a DC 11~32V wide range power input. This industrial panel PC also features 2 COM ports, 4 USB ports and 2 x Gigabit LAN port. It is ideal for use as a PC-based controller for Automotive, Logistic Process, Materials Handling, and Kiosk applications.

Figure 1.1: Front View of APC-3585

Figure 1.2: Rear View of APC-3585

1.4 Chassis Dimensions

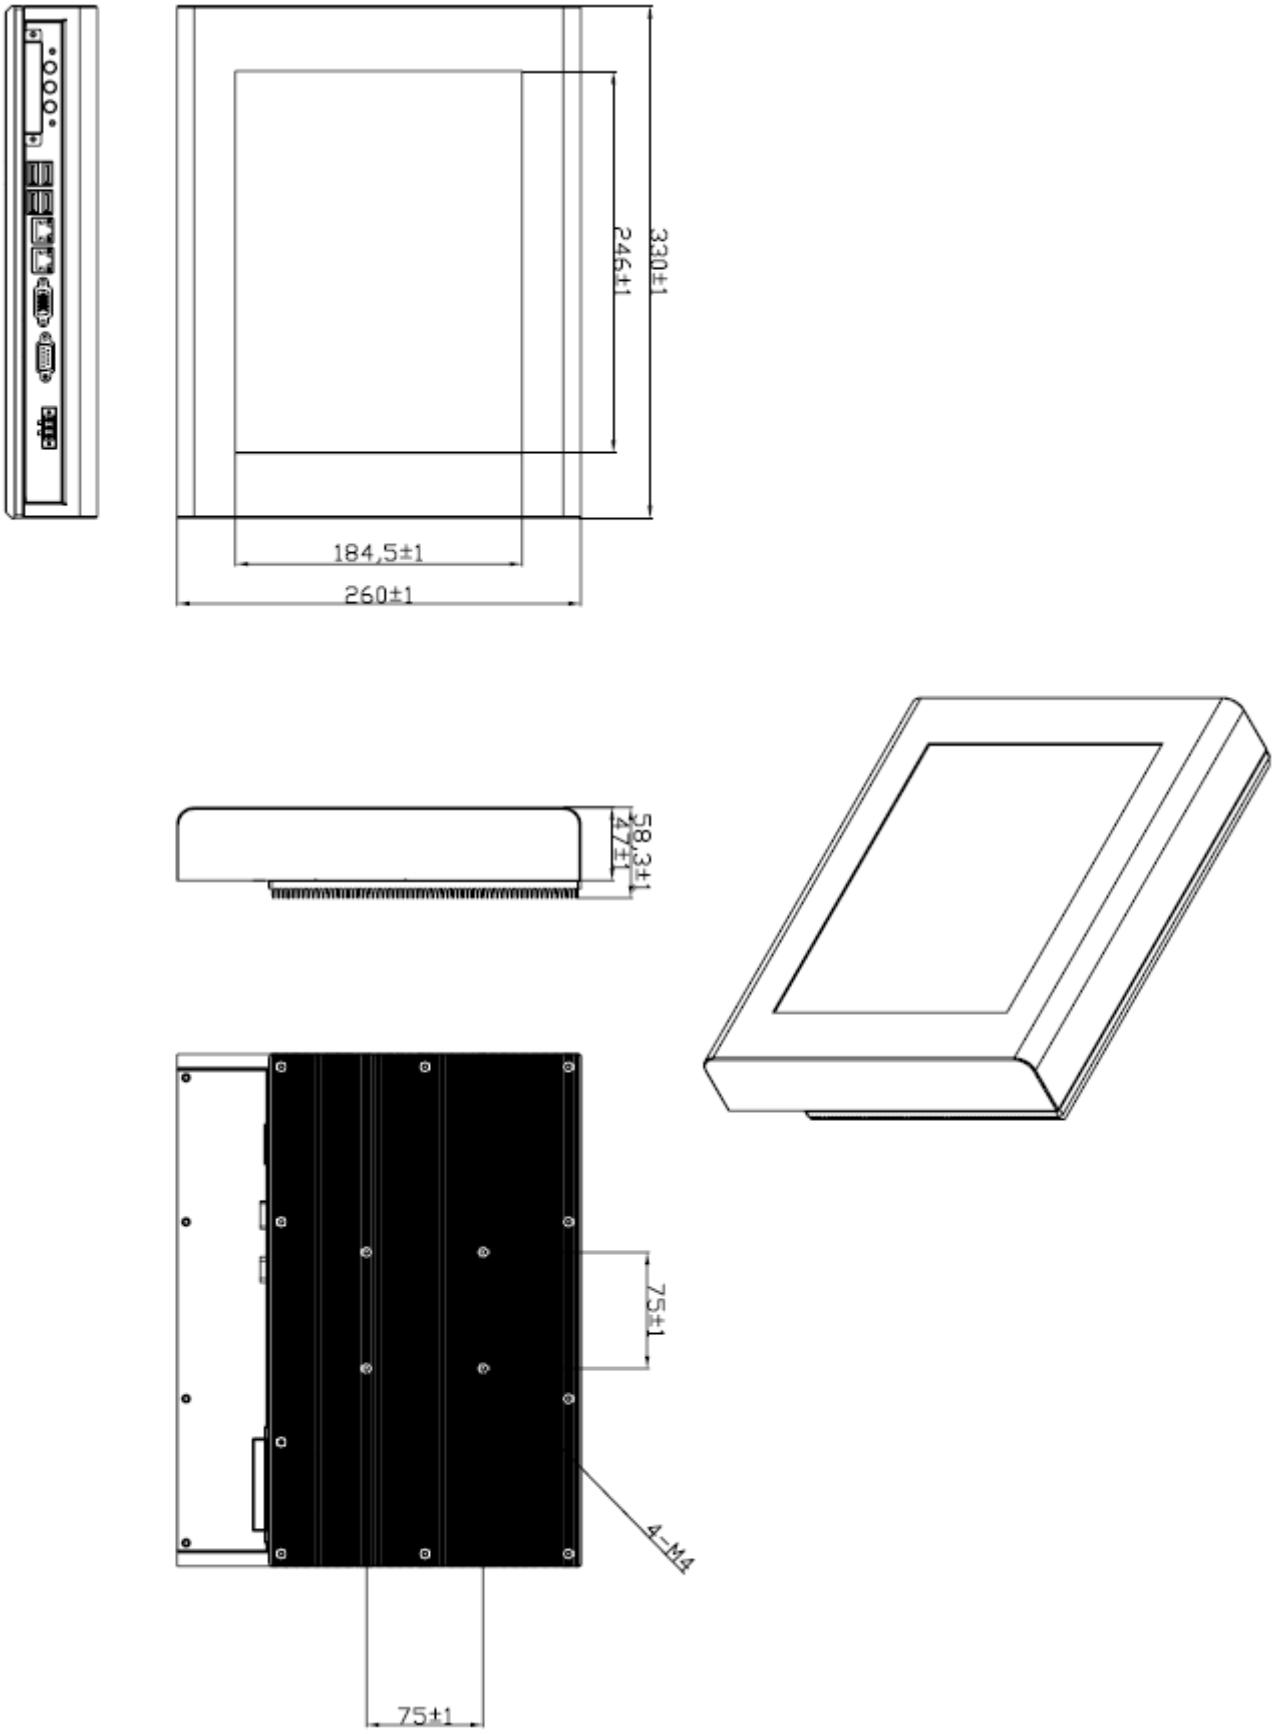

Figure 1.3: Dimensions of the APC-3284/3285

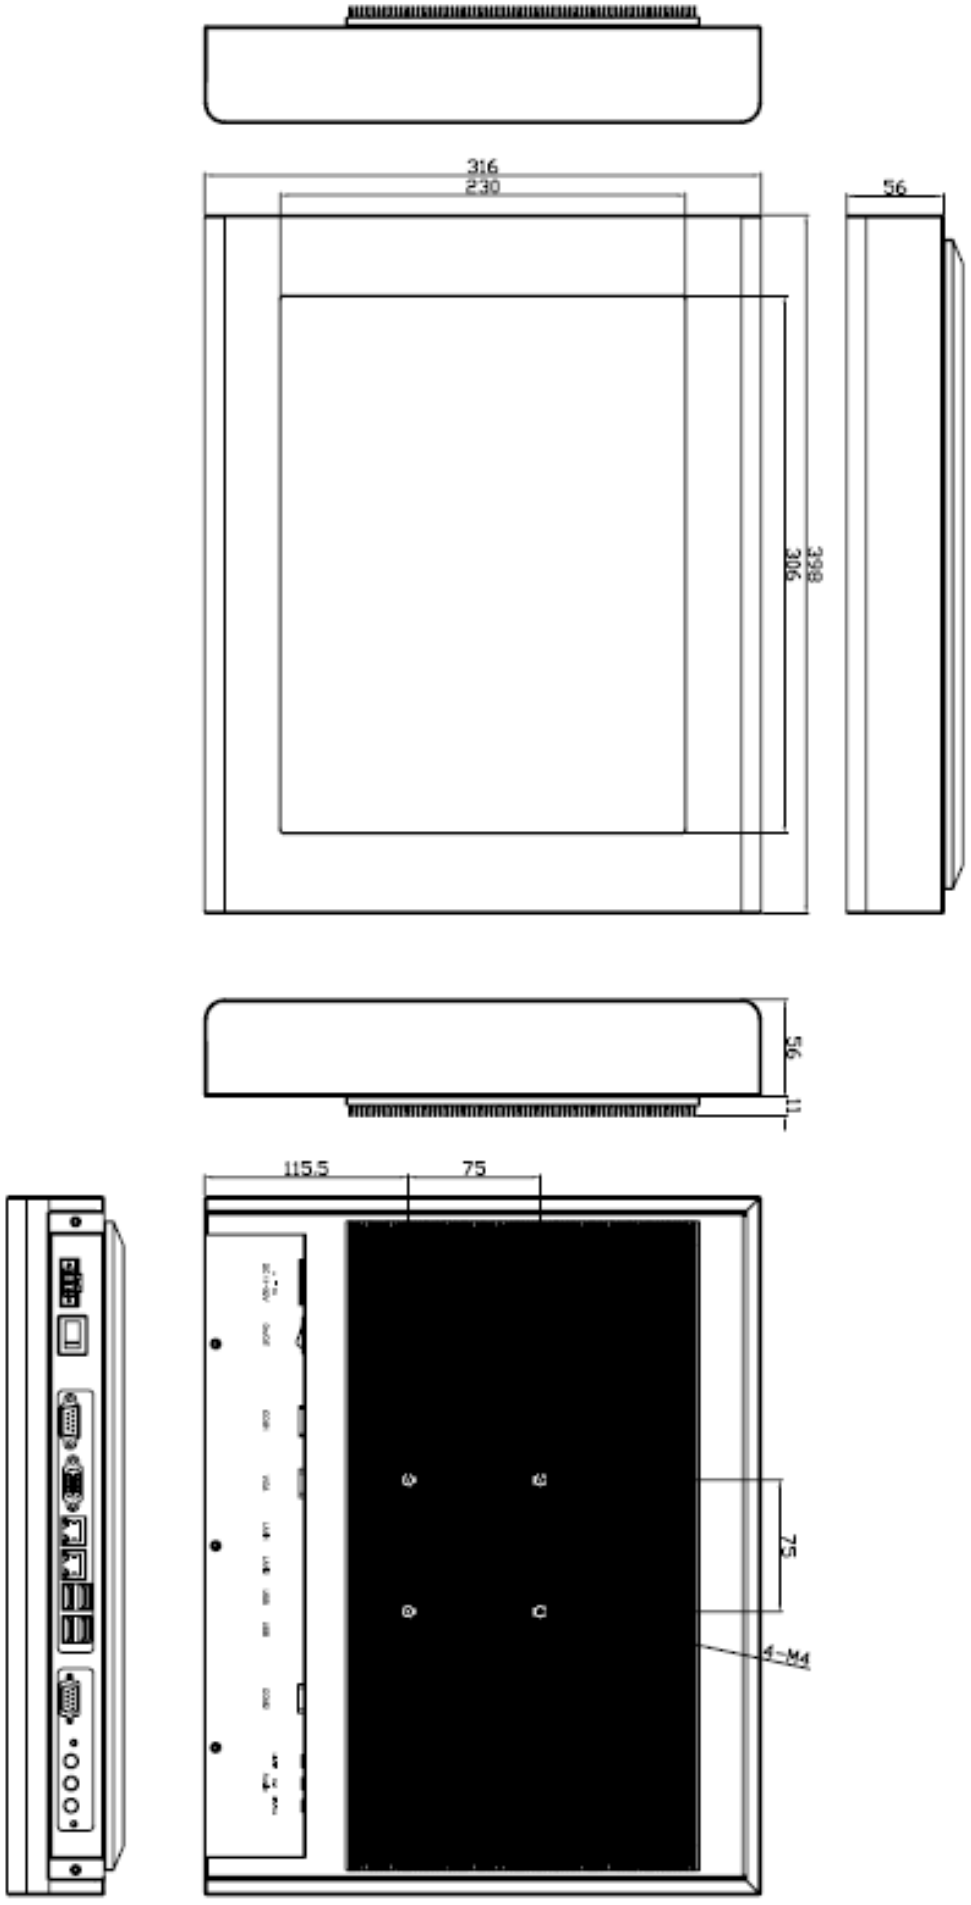

Figure 1.4: Dimensions of the APC-3584/3585

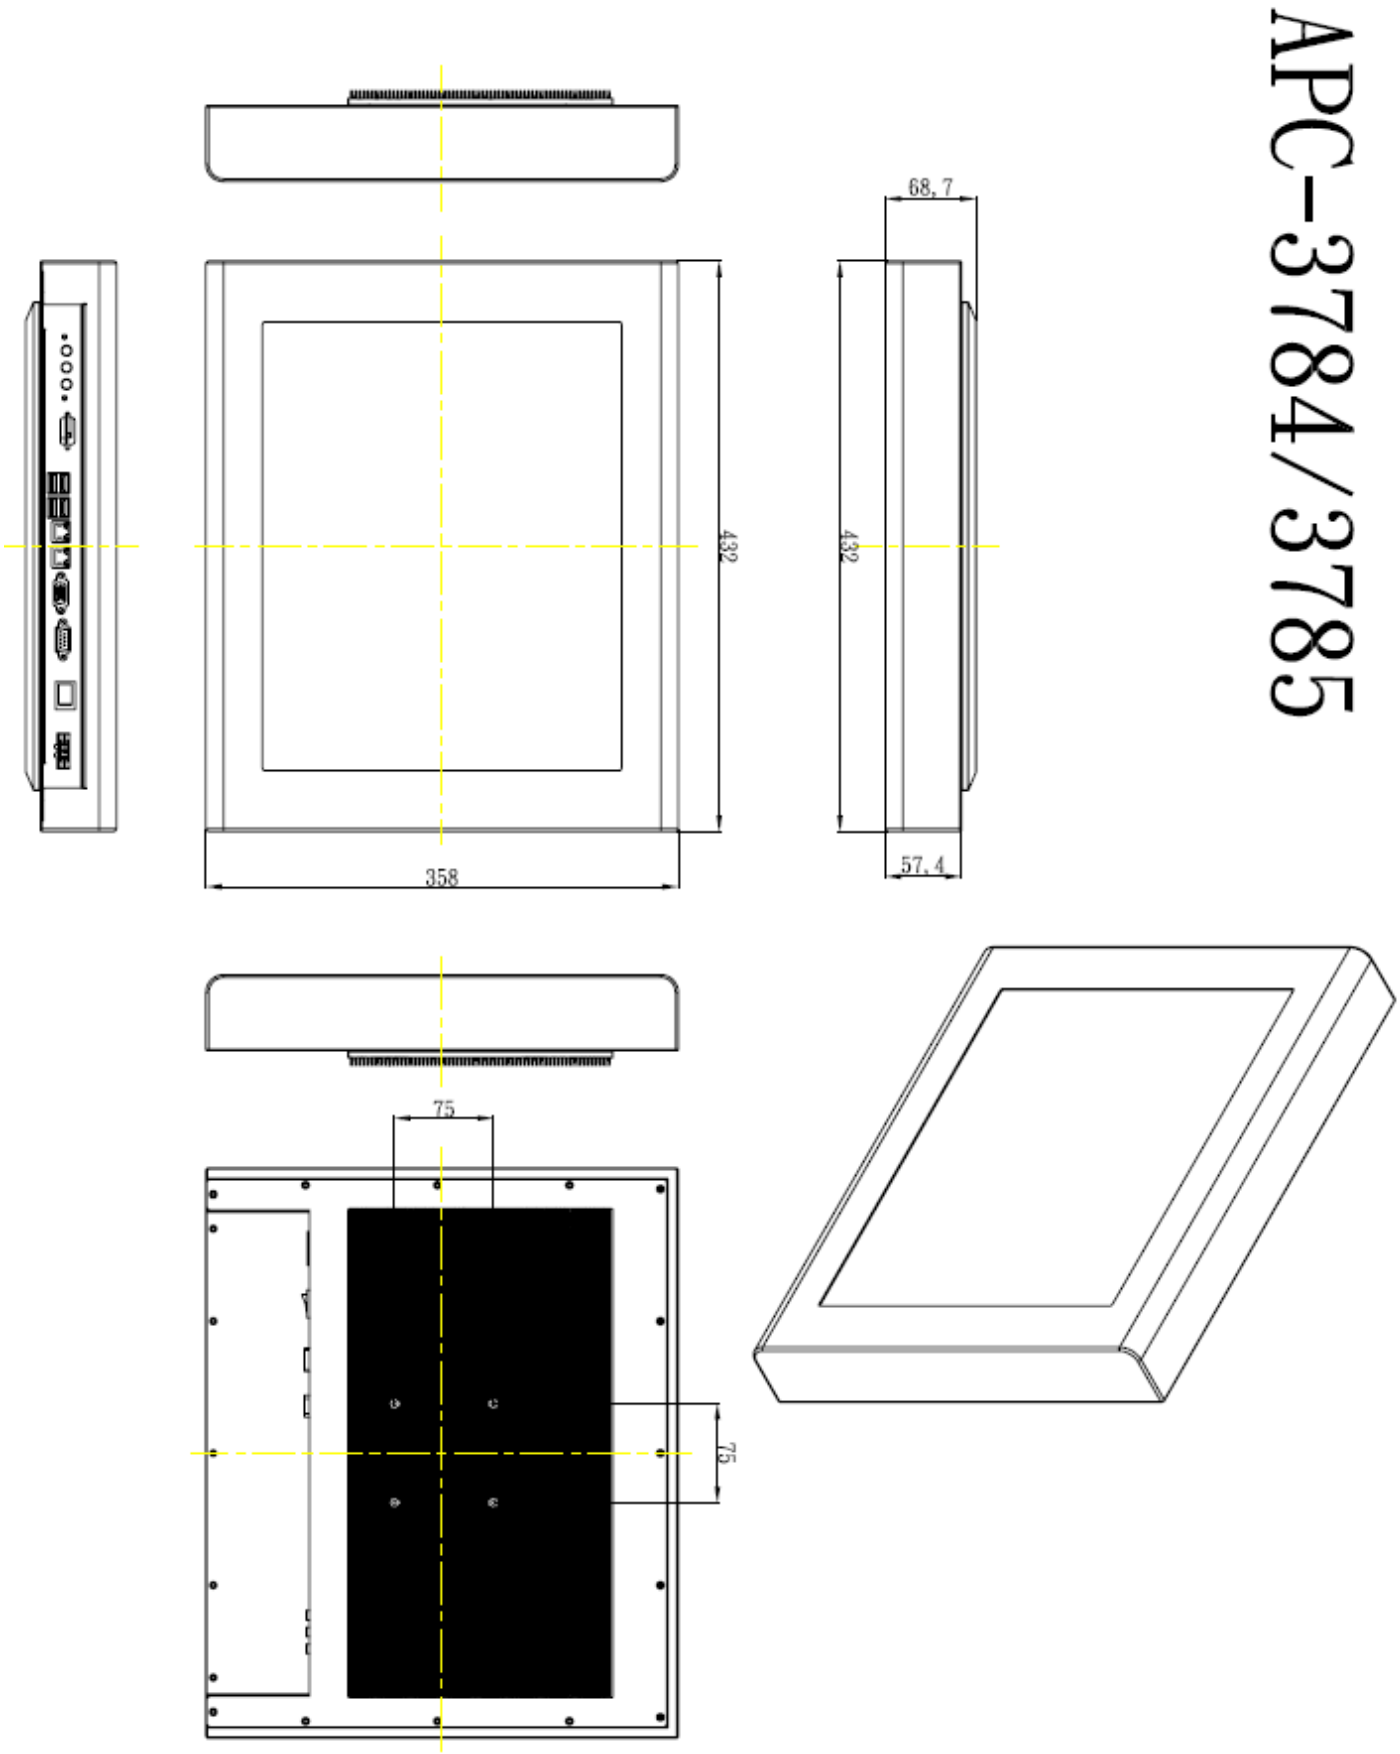

Figure 1.5: Dimensions of the APC-3784/3785

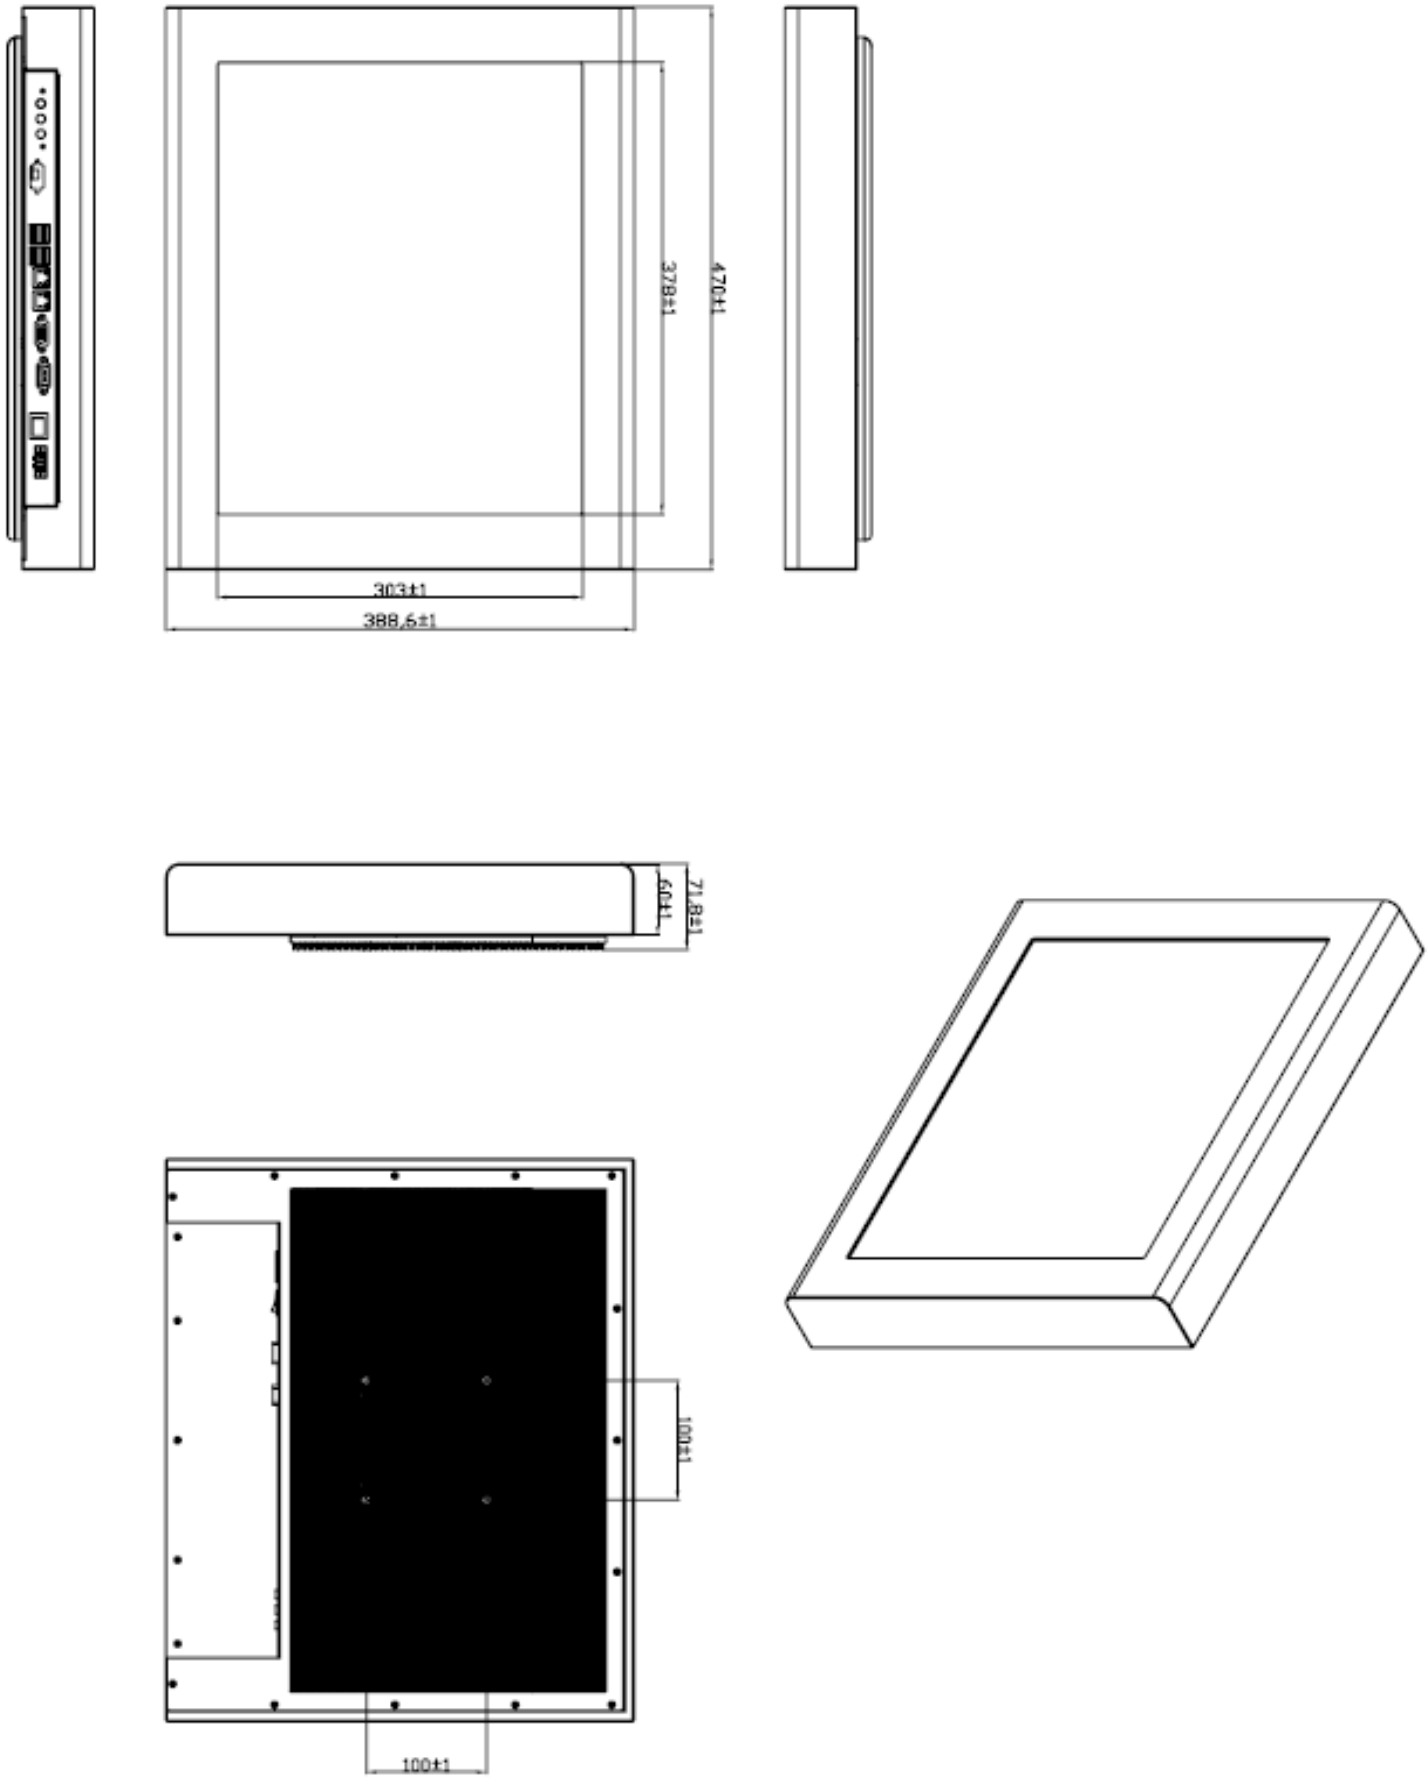

Figure 1.6: Dimensions of the APC-3984/3985

Chapter 2

2 Installation

2.1 Unfastening of Back Cover

First remove the back cover by loosening the screws as the picture.

2.2 Removal of Back Cover

To get the back cover opened up, slightly pull it inward as shown in the picture with your hands and lift it up slowly.

2.3 Installation of HDD

Circled in the picture is HDD brackets used to mount the HDD on the system board. Before doing the mounting, place the brackets by the sides of the HDD and tighten them with the screws as shown by the arrows in the picture.

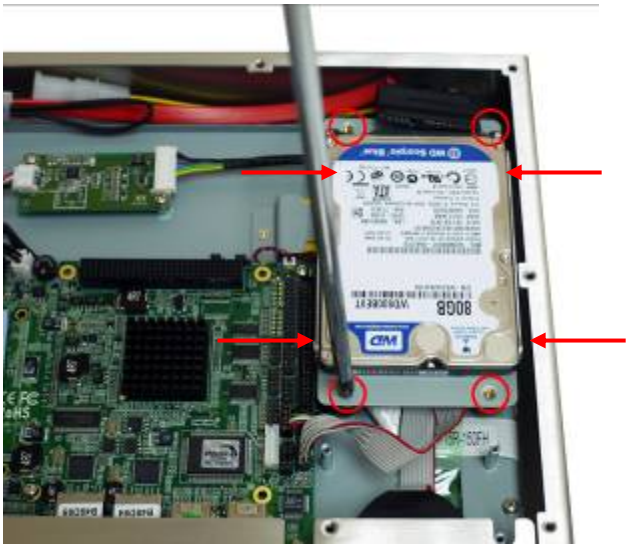

2.4 Connecting HDD Cable

Lastly, connect one end of the HDD cable to the SATA socket while the other end is connected to the HDD interface, making sure the red stripe found on the cable is correctly connected.

Chapter 3

3.1 Mainboard Specifications

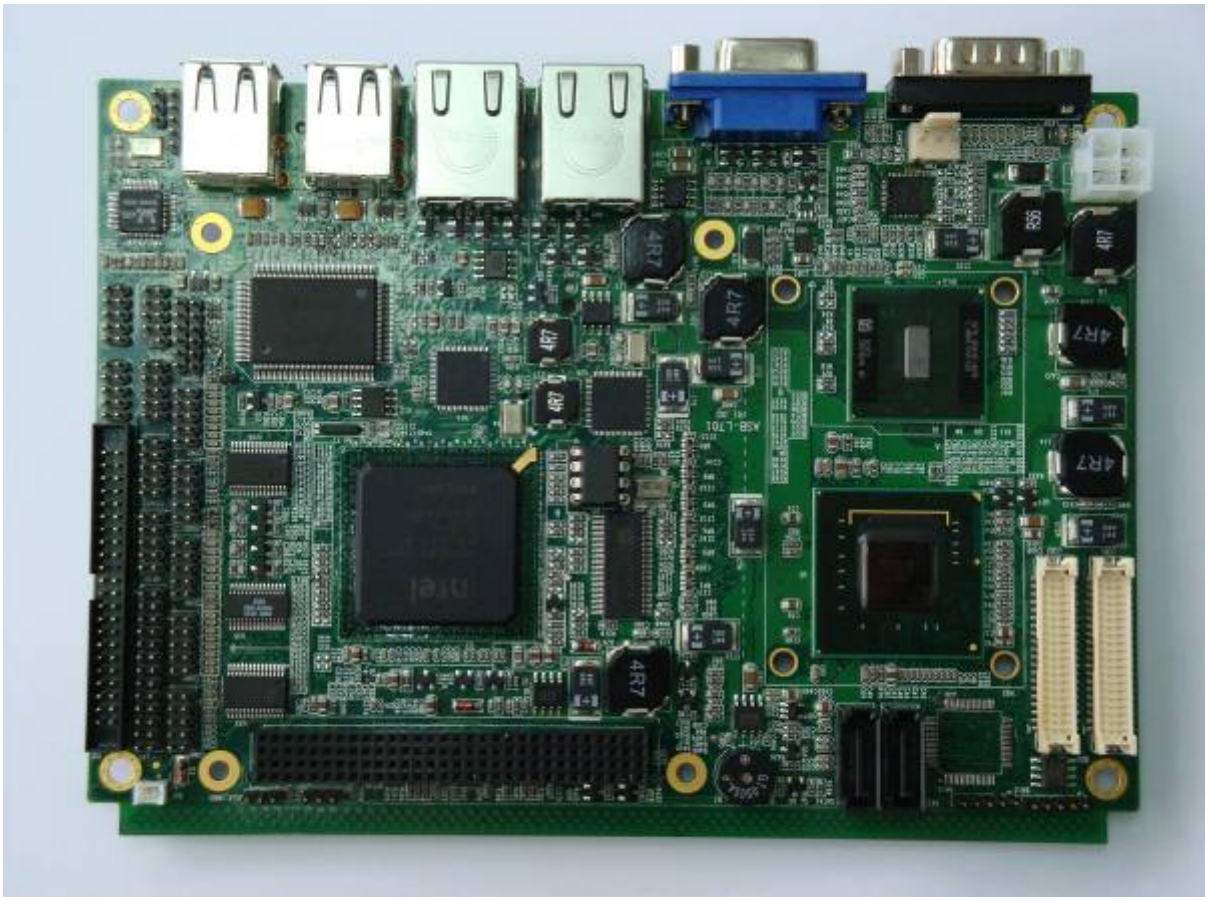

Figure 3.1: Mainboard Overview

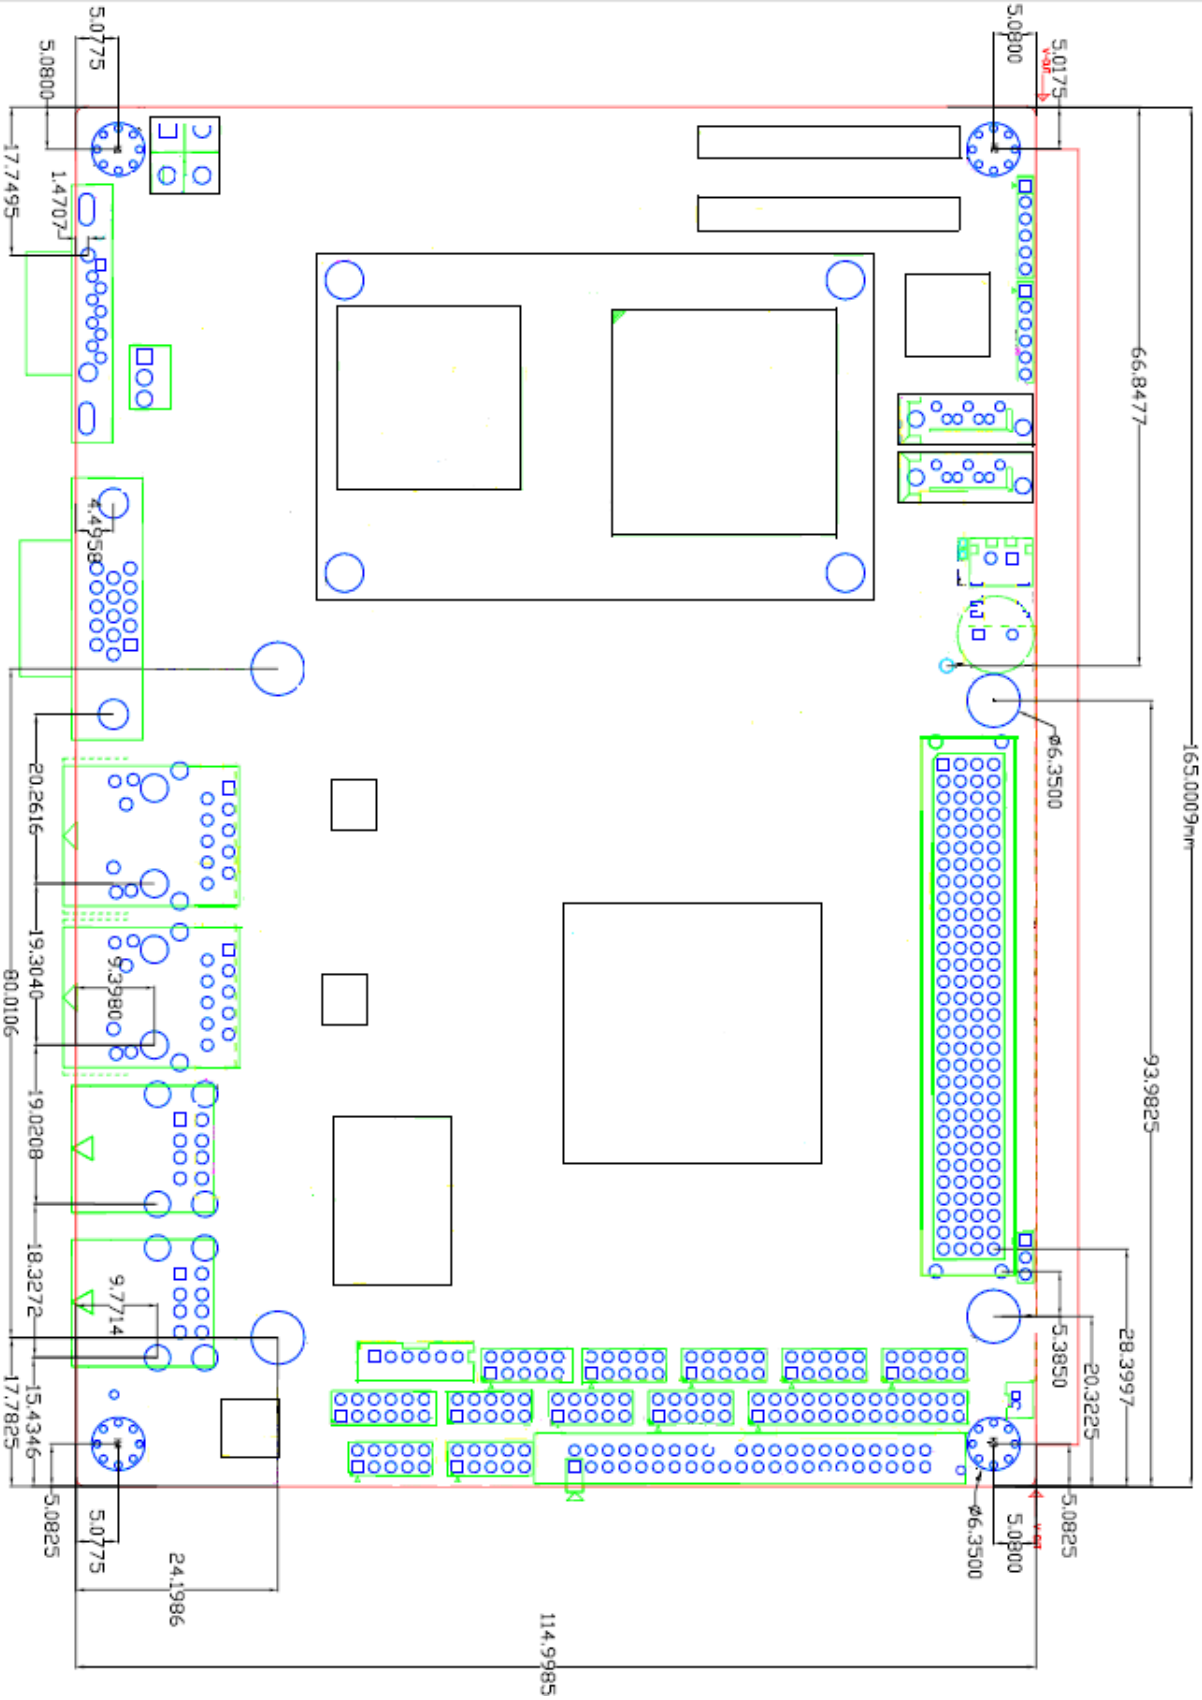

Figure 3.2: Mainboard Dimensions

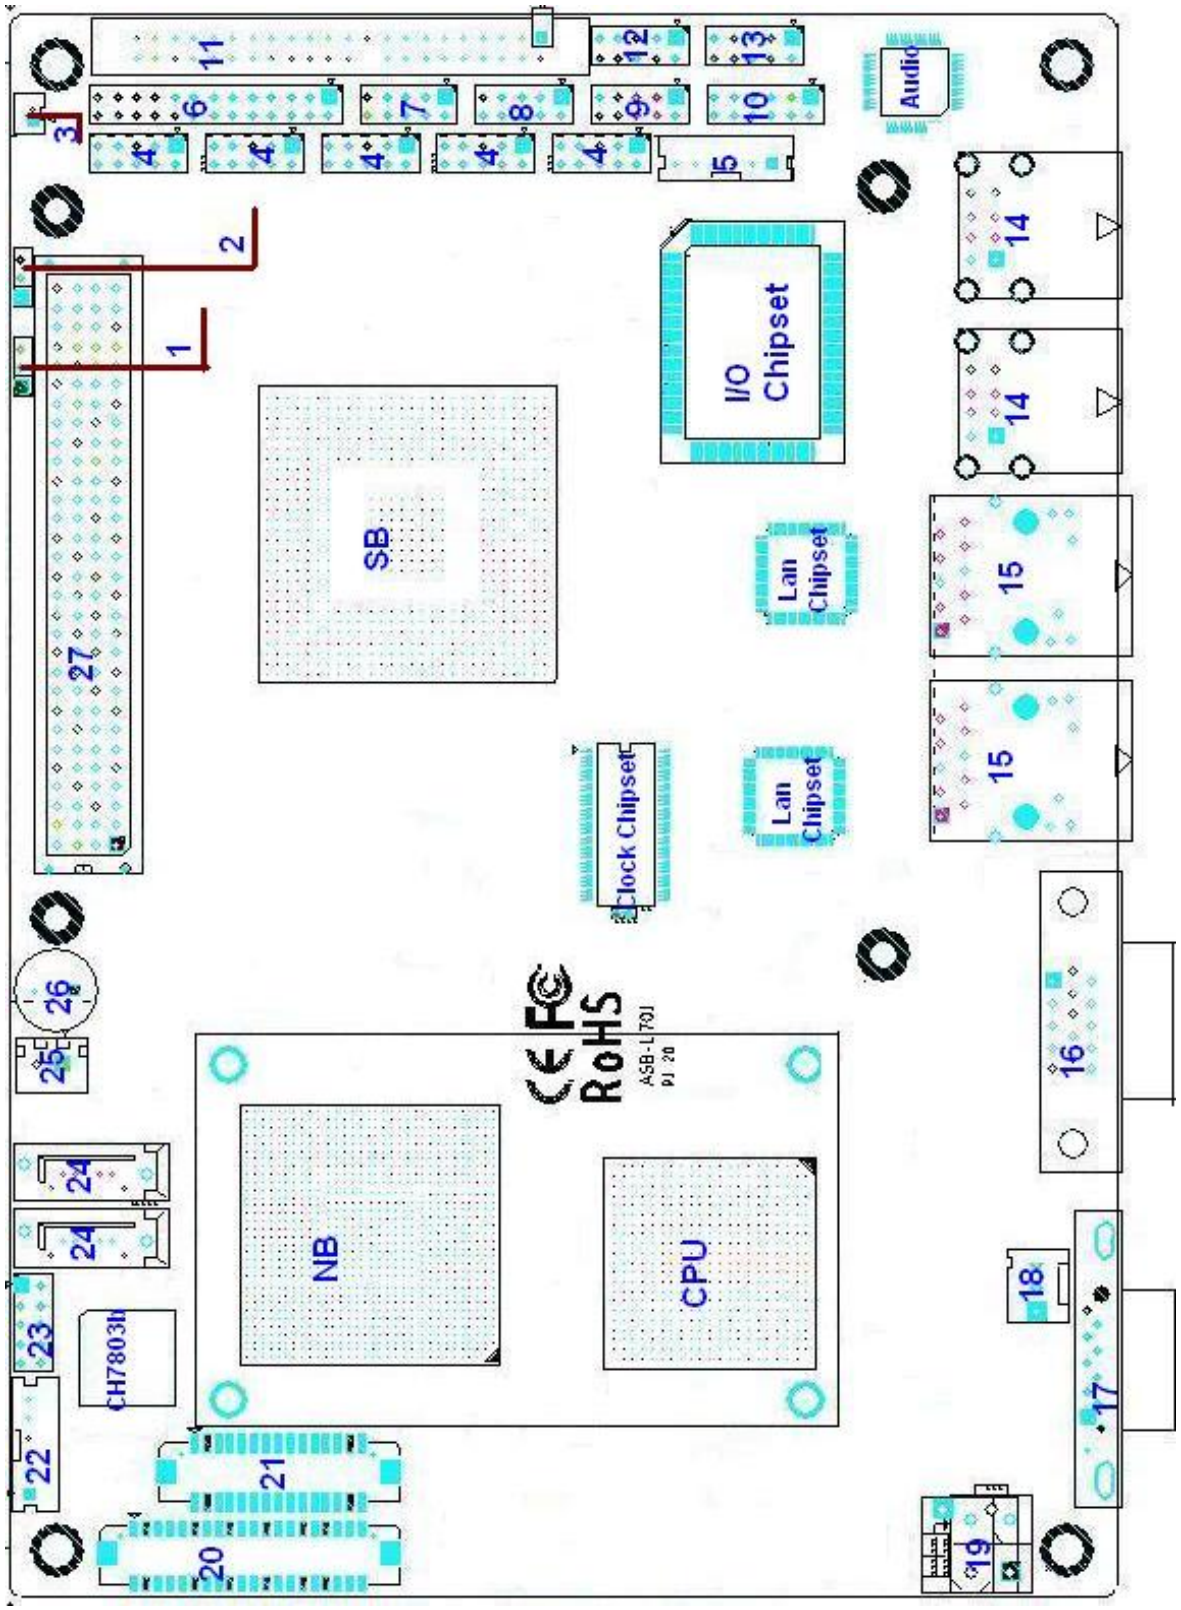
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
Audio
I/O Chipset
SB
Lan Chipset
Clock Chipset
NB
CPU
CH7803B
RoHS

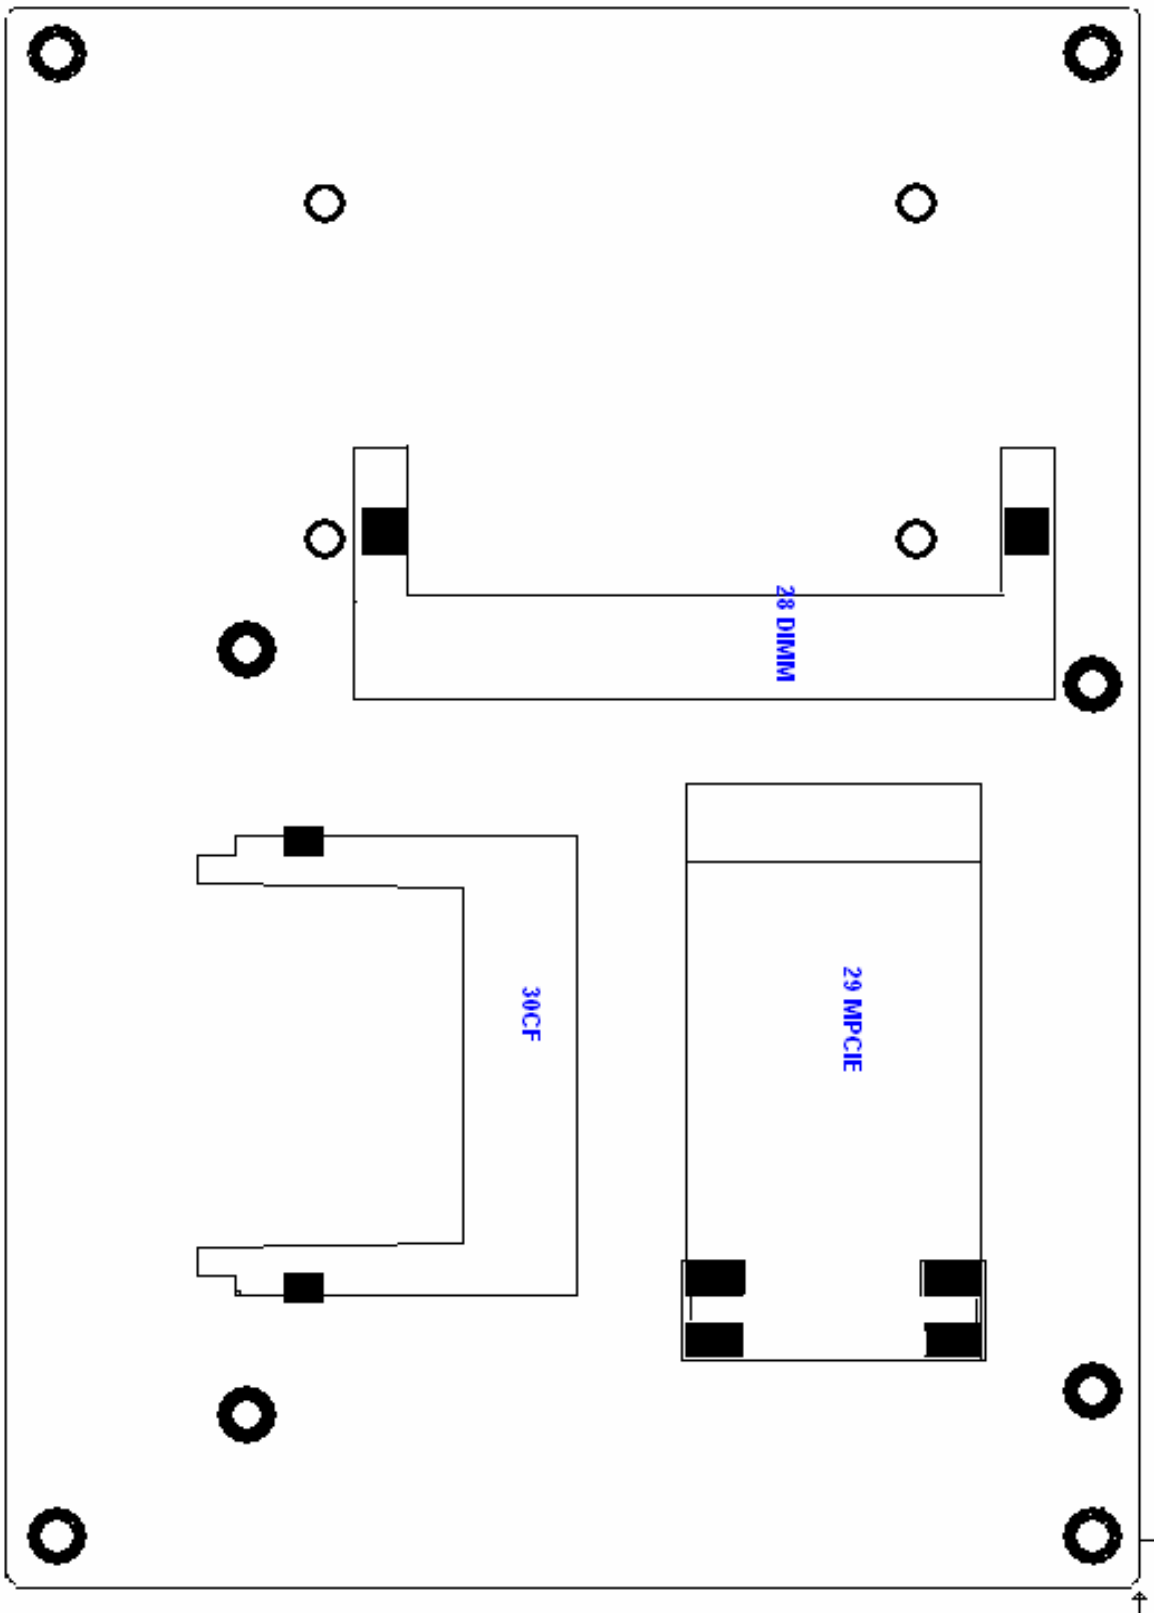

Figure 3.3: Connector and Jumper Locations

Mainboard Specifications	
Board Size	165 x 115mm
CPU Support	Intel Atom N270 1.6 GHz with 533MHz FSB
Chipset	Intel 945GSE + Intel ICH7M
Memory Support	1x200pin 533/400MHz DDR2 SO-DIMM support, up to 2GB SDRAM
Graphics	Intel Graphics Media Accelerator 950VGA integrated in Intel 945GSE 18-bit dual-channel LVDS integrated in Intel 945GSE 18/24 bit dual-channel LVDS support by Chrontel CH7308B 1 x DB15 Female connector for external
Super I/O	Winbond W83627UHG
BIOS	Award BIOS
Storage	2 x SATA Connector 1 x Compact Flash II Slot 1 x 44-pin IDE Connector
Network	2 x Gigabit Ethernet Port by RJ45 with LED indicators - Ethernet controller : 2 x PCIe by one bus Realtek 8111D
USB	4 x USB 2.0 stack port for external 2 x USB 2.0 header for internal
Serial	1 x RS232 port, DB9 connector for external (COM1), pin 9 w/5V/12V/Ring select 1 x RS232/422/485 select header for internal (COM2), default RS232 4 x RS232 header for internal (COM3 – COM6)
Digital I/O	8-bit digital I/O by header 4-bit digital Input 4-bit digital Output
Battery	Support CR2477 battery by 2-pin header
Audio	Support Audio via Realtek ALC662 HD audio decoder Support Line-in, Line-out, MIC by 2x5-pin header
Printer	1x LPT port by 2x13-pin header
Keyboard /Mouse	1x PS2 keyboard/mouse by 1x6 -pin wafer connector

Expansion Bus	1x PC 104+ connector (PCI master 4, jumper for +3.3V & 5V select) 1x PCIe (PCI-e 1x +SMBUS+USB2. 0) mini card
Power Management	DC12V input 1 x 2x2-pin power input connector
Front I/O	by 2x5-pin header Power on/off switch Reset switch Power LED status HDD LED status Buzzer
Watchdog Timer	Software programmable 1 – 255 second by Super I/O
External I/O port	1 x COM Port (COM1) 4 x USB 2.0 Ports (stack) 2 x RJ45 GbE Port (10/100/1000Mbps) 1 x VGA Port
Temperature	Operating: 0 – 60 degree C Storage: -20 – 80 degree C
Humidity	5% - 95%, non-condensing, operating
Power Consumption	12V @1.4 5A (Intel N270 processor with 1GB DDR2 DRAM)
EMI/EMS	CE/FCC class A

3.2 Installations

3.2.1 SO-DIMM Installation

To install a SO-DIMM into a SO-DIMM socket, please follow the steps below and refer to picture.

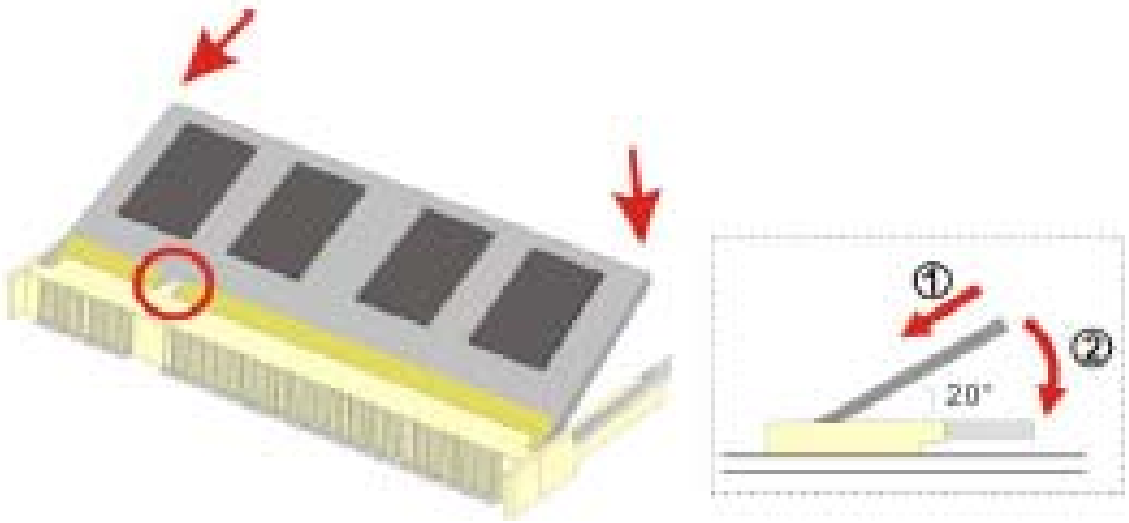

Figure 2.2: Installation of Memory Module

Step 1:

Locate the SO-DIMM socket. Place the NANO-945GSE2 on an anti-static pad with the solder side facing up.

Step 2:

Align the SO-DIMM with the socket. The SO-DIMM must be oriented in such away that the notch in the middle of the SO-DIMM must be aligned with the plastic bridge in the socket.

Step 3:

Insert the SO-DIMM. Push the SO-DIMM chip into the socket at an angle. (See **Figure 2.3**)

Step 4:

Open the SO-DIMM socket arms. Gently pull the arms of the SO-DIMM socket out and push the rear of the SO-DIMM down

3.3 Onboard Jumpers and Port Pinouts

1. JVCCIO (2.0MM 1X3) PC104+ port voltage selection jumper: select voltage for PC104+ device

JVCCIO	PC104+ VCCIO Voltage
CLOSE 1-2	**+3.3V (default)**
CLOSE 2-3	+5V

2. JCLR_CMOS (2.0MM 1X3) CMOS clear jumper: CMOS clear operation will permanently reset old BIOS settings to factory defaults.

JCLR_CMOS	CMOS
CLOSE 1-2	**NORMAL (default)**
CLOSE 2-3	CLEAR CMOS

Procedures of CMOS clear:

1. Turn off the system and unplug the power cord from the power outlet;
2. To clear the CMOS settings, use the jumper cap to close pins 2 and 3 for about 3 seconds then reinstall the jumper clip back to pins 1 and 2.
3. Power on the system again;
4. When entering the POST screen, press the <DEL> key to enter CMOS Setup Utility to load optimal defaults;
5. After the above operations, save changes and exit BIOS Setup.

3. BAT (1.25.0MM 1X2) Battery port: a 3.3V battery is embedded to provide power for CMOS.

PIN#	Signal Name
PIN1	VBAT
PIN2	Ground

4.COM2-COM6 (2.0MM 2X5) COM2~COM6 port: up to 5 standard RS232 ports are provided. They can be used directly via COM adapter cable connection.

Signal Name	Pin#	Pin#	Signal Name
DCD	1	2	RXD
TXD	3	4	DTR
Ground	5	6	DSR
RTS	7	8	CTS
RI	9	10	NC

Note: COM2 port is controlled by pins No.8~10 of JCOM. For details, please refer to description of JCOM.

5.KB/MS (2.0MM 1X6) PS/2 keyboard/mouse port: the port can be connected to PS/2 keyboard or mouse via a dedicated adapter cable for direct use.

Pin#	Signal Name
1	KBDATA
2	MSDATA
3	Ground
4	+5V
5	KBCLK
6	MSCLK

6. LPT (2.0MM 2X13) Parallel port: a standard 26 pin parallel port is provided to connect parallel peripherals as required.

Signal Name	Pin#	Pin#	Signal Name
PSTB#	1	2	PD0
PD1	3	4	DP2
DP3	5	6	DP4
DP5	7	8	DP6
DP7	9	10	ACK#
BUSY	11	12	PE
SLCT	13	14	AFD#
ERR#	15	16	INIT#
SLIN#	17	18	Ground
Ground	19	20	Ground
Ground	21	22	Ground
Ground	23	24	Ground
Ground	25	26	Ground

7. GPIO (2.0MM 2X5) General-purpose input/output port: it provides a group of self-programming interfaces to customers for flexible use.

Signal Name	Pin#	Pin#	Signal Name
GPIO20	1	2	GPIO60
GPIO21	3	4	GPIO61
GPIO22	5	6	GPIO62

GPIO23	7	8	GPIO63
Ground	9	10	+5V

8. COM22 (2.0MM 2X5): it provides selectable RS422/485 serial signal output.

Signal Name	Pin#	Pin#	Signal Name
A	1	2	Terminal Resistance
B	3	4	Terminal Resistance
Z	5	6	NC
Y	7	8	NC
Ground	9	10	NC

9. USB4 (2.0MM 2X5) **Front USB connector**: it provides two USB ports via a dedicated USB adapter cable.

Signal Name	Pin#	Pin#	Signal Name
+5V	1	2	+5V
USB_P6_DN	3	4	USB_P7_DN
USB_P6_DP	5	6	USB_P7_DP
Ground	7	8	Ground
NC	9	10	Ground

Note:

Before connection, make sure that pinout of the USB adapter is in accordance with that of the said tables. Any inconformity may cause system down and even hardware damages.

10. JCOM (2.0MM 2X6) **COM1/2 setup jumper**: pin 1~6 are used to select signal out of pin 9 of COM1 port; pin 7~12 are used to select output type for COM2 port (RS232 or RS422/485).

JCOM	Function
CLOSE 1-2	**COM1 Pin9=RI (default)**
CLOSE 3-4	COM1 Pin9=+5V
CLOSE 5-6	COM1 Pin9=+12V
CLOSE 7-9 **CLOSE 8-10**	**COM2 FOR RS232 FROM COM2 (default)**
CLOSE 9-11 CLOSE 10-12	COM2 FOR RS485/RS422 FROM COM22

Note:

1. As determined by its hardware design, the board features full-duplex RS485 communication. Like RS422, a four-wire connection is necessary.
2. Since COM2 and COM22 use the same address, they cannot work at the same time.

11. IDE (2.0MM 2X22) IDE connector: the motherboard provides a 44-pin IDE connector for connection of 2.5' IDE hard disk drivers and supports up to 2 IDE devices.

Signal Name	Pin#	Pin#	Signal Name
RESET	1	2	Ground
IDE_PDD7	3	4	IDE_PDD8
IDE_PDD6	5	6	IDE_PDD9
IDE_PDD5	7	8	IDE_PDD10
IDE_PDD4	9	10	IDE_PDD11
IDE_PDD3	11	12	IDE_PDD12
IDE_PDD2	13	14	IDE_PDD13
IDE_PDD1	15	16	IDE_PDD14
IDE_PDD0	17	18	IDE_PDD15
Ground	19	20	NC
DREQ	21	22	Ground
IOW#	23	24	Ground
IOR#	25	26	Ground
IOCHRDY	27	28	Ground
DACK#	29	30	Ground
IRQ14	31	32	NC
Address 1	33	34	IDE_PDIAG
Address 0	35	36	Address 2
Chip select 0	37	38	Chip select 1
Activity	39	40	Ground
+5V	41	42	+5V
Ground	43	44	NC

Note:

If two IDE devices are connected, CF card connection cannot be realized.

12. F_PANEL (2.0MM 2X5) Front panel connector

Signal Name	Pin#	Pin#	Signal Name
HD LED+	1	2	POWER LED+
HD LED-	3	4	POWER LED-

Ground	5	6	PWRBTN
RESET	7	8	Ground
BUZZER+	9	10	BUZZER-

PIN1&3: They are used to connect hard disk activity LED. The LED blinks when the hard disk is reading or writing data.

PIN2&4: They are used to connect power LED. When the system is powered on or under S0/S1 state, the LED is normally on; when the system is under S4/S5 state, the LED is off.

PIN5&6: They are used to connect power switch button. The two pins are disconnected under normal condition. You may short them temporarily to realize system startup & shutdown or awaken the system from sleep state.

PIN7&8: They are used to connect reset button. The two pins are disconnected under normal condition. You may short them temporarily to realize system reset.

PIN9&10: They are used to connect an external buzzer.

Note:

When connecting LEDs and buzzer, pay special attention to the signal polarity.

Make sure that the connector pins have a one-to-one correspondence with chassis wiring, or it may cause boot up failure.

13. F_AUDIO (2.0MM 2X5)

Front Audio: An onboard REALTEL ALC662 CODEC is used to provide high-quality audio I/O ports; Line Out can be connected to a headphone or amplifier; Line In is used for the connection of external audio source via a Line in cable; Mic is the port for microphone input audio.

Signal Name	Pin#	Pin#	Signal Name
FRONT-OUT-L	1	2	LINEIN_R
AUD_AGND	3	4	AUD_AGND
FRONT-OUT-R	5	6	LINEIN_L
AUD_AGND	7	8	AUD_AGND
FRONT-MIC1	9	10	AUD_AGND

Note:

The board only supports mono microphone input.

14. USB1/2

Rear USB connector: it provides up to 4 USB2.0 ports.

15. LAN1/2

Rear LAN connectors: 2 standard 1000M RJ-45 Ethernet ports are provided.

LINK LED (green) and ACTIVE LED (yellow) respectively located at the left-hand and right-hand side of the Ethernet port indicate the activity and transmission state of LAN.

16. VGA (Video Graphic Array): GMA950 GPU is integrated to provide high-quality video output.

17. COM Rear serial port: standard DB9 serial port is provided to make a direct connection to serial devices.

18. FAN (2.54MM 1X3) Fan connector: cooling fans can be connected directly for use. You may set the rotation condition of cooling fan in PC Health Status menu of BIOS Setup.

Pin#	Signal Name
1	Ground
2	+12V
3	Rotation detection

Note: Output power of cooling fan must not be above 5W.

19. AT12V (5.0MM 1X2) 12V System power input connector

Pin#	Signal Name
1	+12V
2	Ground

Note:

Make sure that the voltage of power supply is DC(12±5%)V before power on, or it may cause boot up failure and even system damage.

20. LVDS1 for dual 24 bit 24-bit LVDS output connector: Fully supported by CHRONTEL CH70308BE chipset, the interface features single and dual channel 18-bit and 24-bit output with maximum resolution support up to 1600*1200. The format of connected display screen is OPENLDI. Model name of the interface connector is Hirose DF13-40DP-1.25V.

Signal Name	Pin#	Pin#	Signal Name
+5V	1	2	+5V
Ground	3	4	Ground
+3.3V	5	6	+3.3V
A0M	7	8	A4M
A0P	9	10	A4P
Ground	11	12	Ground

A1M	13	14	A5M
A1P	15	16	A5P
Ground	17	18	Ground
A2M	19	20	A6M
A2P	21	22	A6P
Ground	23	24	Ground
CLK1M	25	26	CLK2M
CLK1P	27	28	CLK2P
Ground	29	30	Ground
SC_DDC	31	32	SD_DDC
Ground	33	34	Ground
A3M	35	36	A7M
A3P	37	A3M	A7P
NC	39	40	NC

21. LVDS1 for dual 18 bit **18-bit LVDS output connector**: Fully supported by INTEL945GSE

chipset, the interface features single and dual channel 18-bit output with maximum resolution support up to 1600*1200. The format of connected display screen is SPWG. Model name of the interface connector is Hirose DF13-30DP-1.25V.

Signal Name	Pin#	Pin#	Signal Name
LVDS1_VDD5	1	2	LVDS1_VDD5
Ground	3	4	Ground
LVDS1_VDD33	5	6	LVDS1_VDD33
LADATAN0	7	8	LBDATAN0
LADATAP0	9	10	LBDATAP0
LADATAN1	11	12	LBDATAN1
LADATAP1	13	14	LBDATAP1
LADATAN2	15	16	LBDATAN2
LADATAP2	17	18	LBDATAP2
LACLKN	19	20	LBCLKN
LACLKP	21	22	LBCLKP
LDDC_CLK	23	24	LDDC_DATA
LBKLT_EN	25	26	JLVDS_CTRL
Ground	27	28	Ground
+V12S	29	30	+V12S

22. BKL1 (2.0MM 1X5) Backlight control connector for LVDS1/2

Pin#	Signal Name
1	+12V
2	+12V
3	Ground
4	Ground
5	ENABKL
6	CTRBKL

23. JLVDS (2.0MM 1X6) Choice jumper for LVDS1/2

Signal Name	BKL For LVDS1	BKL For LVDS2
BackLight_EN	Close1-3	Close3-5
PWM	Close2-4	Close7-8
LEVEL	Close4-6	Close7-9

Note: Make sure based on LCD feature to set jumper correctly；The voltage value of LVDS1 is 3.3, and the voltage value of LVDS2 is 5.0

24. SATA1/2 **SATA Connectors:** two SATA connectors are provided, with transfer speed up to 3.0Gb/s.

25. CN1 **(2.5MM 1X2)**: an onboard 5V output connector is reserved to provide power for IDE/SATA devices.

Pin#	Signal Name
1	+5V
2	Ground

Note:

Output current of the connector must not be above 1A.

26. BZ **Buzzer**: onboard buzzer

27. PC104+ **PC104+ connector**: it conforms to standard PC104+ specification.

28. DIMM **Memory socket**: the socket is located at the backside of the board and supports

200PIN 1.8V DDRII400/533 memory module up to 2G. If a DDRII667/800 memory module is installed, the system will reduce the DRAM frequency to 533MHz.

29. MPCIE Mini PCIE slot: it supports MINI PCIE devices with USB2.0, SMBUS and PCIE signal.

30. CF CF Card Slot: it is located at the backside of the board and serves as an insert interface for Type I and Type II Compact Flash card. The operating voltage of CF card can be set as 3.3V or 5V. The default setting of the product is 3.3V.

Chapter 4

4.1 Operations after POST Screen

After CMOS discharge or BIOS flashing operation, the system will display the following screen for your further operation. Press **F1** key to continue or **Del** key to enter CMOS Setup.

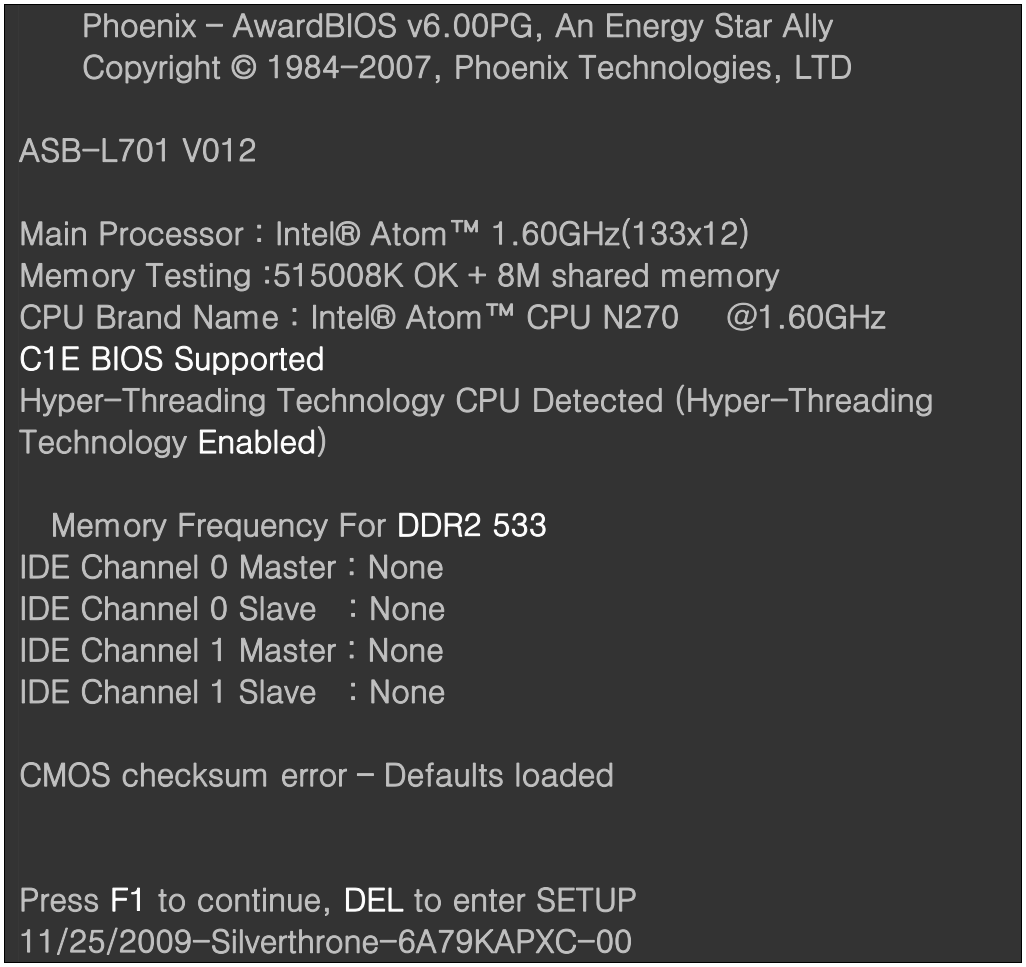
Phoenix – AwardBIOS v6.00PG, An Energy Star Ally
Copyright © 1984–2007, Phoenix Technologies, LTD
ASB-L701 V012
Main Processor : Intel® Atom™ 1.60GHz(133x12)
Memory Testing :515008K OK + 8M shared memory
CPU Brand Name : Intel® Atom™ CPU N270 @1.60GHz
C1E BIOS Supported
Hyper-Threading Technology CPU Detected (Hyper-Threading Technology Enabled)
Memory Frequency For DDR2 533
IDE Channel 0 Master : None
IDE Channel 0 Slave : None
IDE Channel 1 Master : None
IDE Channel 1 Slave : None
CMOS checksum error – Defaults loaded
Press F1 to continue, DEL to enter SETUP
11/25/2009-Silverthrone-6A79KAPXC-00

After optimizing and exiting CMOS Setup, the POST screen displayed for the first time is as follows and includes basic information on BIOS, CPU, memory, and storage devices.

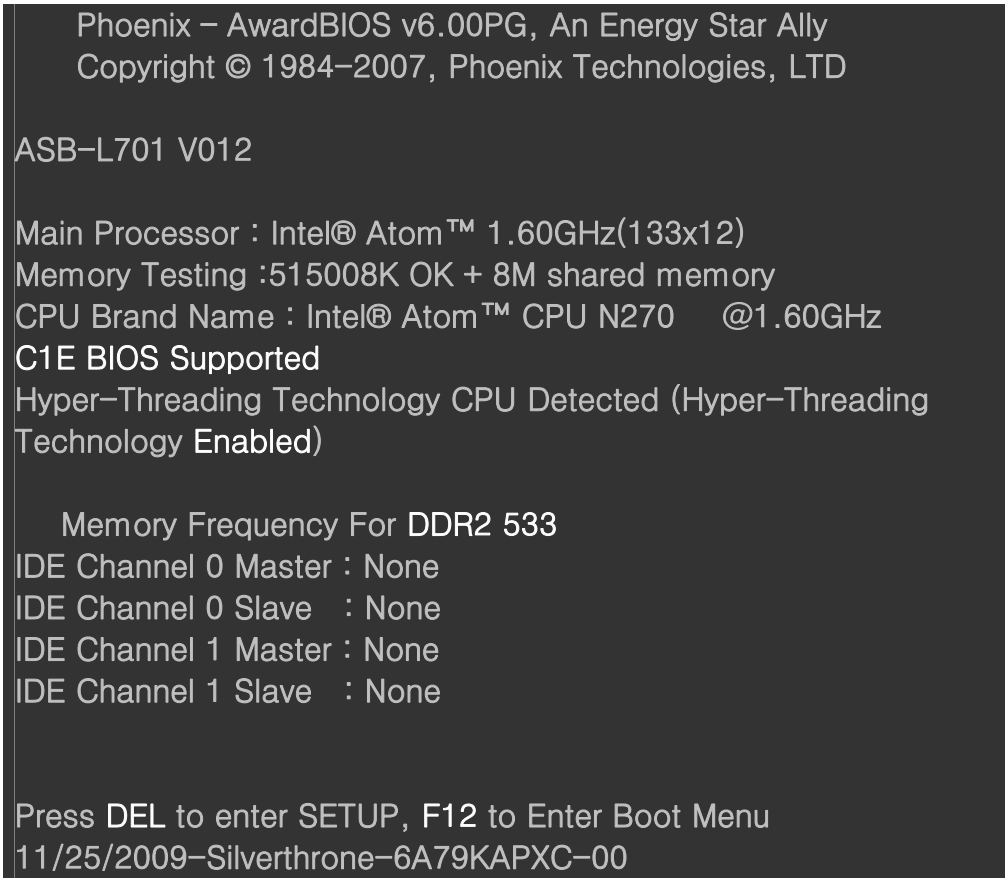
Phoenix – AwardBIOS v6.00PG, An Energy Star Ally
Copyright © 1984–2007, Phoenix Technologies, LTD
ASB–L701 V012
Main Processor : Intel® Atom™ 1.60GHz(133x12)
Memory Testing :515008K OK + 8M shared memory
CPU Brand Name : Intel® Atom™ CPU N270 @1.60GHz
C1E BIOS Supported
Hyper–Threading Technology CPU Detected (Hyper–Threading Technology Enabled)
Memory Frequency For DDR2 533
IDE Channel 0 Master : None
IDE Channel 0 Slave : None
IDE Channel 1 Master : None
IDE Channel 1 Slave : None
Press DEL to enter SETUP, F12 to Enter Boot Menu
11/25/2009–Silverthrone–6A79KAPXC–00

Press **F12** key to enter Boot Menu during POST, as shown by the following figure.

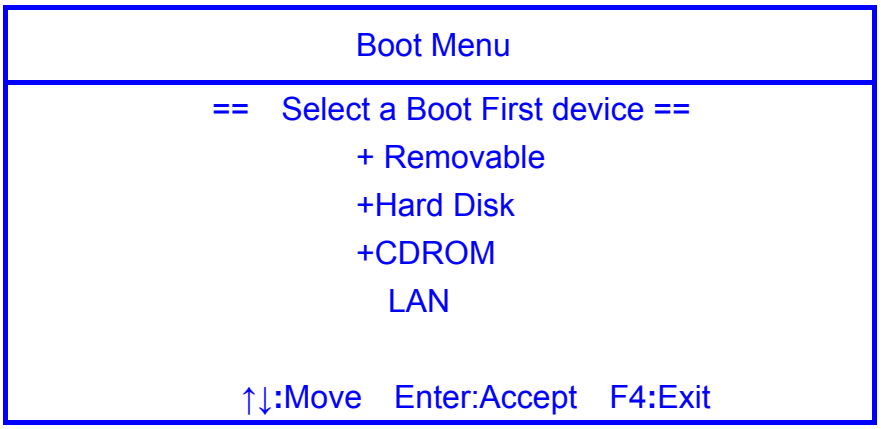

4.2 Standard CMOS Features

Press [Del] key to enter BIOS Setup utility during POST, and then a main menu containing system summary information will appear.

Phoenix – Award BIOS CMOS Setup Utility

►Standard CMOS Features	Load Fail-Safe Defaults
►Advanced BIOS Features	Load Optimized Defaults
►Advanced Chipset Features	Set Administrator Password
►Integrated Peripherals	Set User Password
►Power Management Setup	Save & Exit Setup
►PnP/PCI Configurations	Exit Without Saving
►PC Health Status	
Esc : Quit	↑↓→← : Select Item
F10 : Save & Exit Setup	
Time, Date, Hard Disk Type…	

Standard CMOS Features

Use this menu to modify basic system configurations such as time, date and etc.

Advanced BIOS Features

Use this menu configure advanced features of Award® BIOS.

Advanced Chipset Features

Use this menu to change the values in the chipset registers and optimize your system performance.

Integrated Peripherals

Use this menu to specify your settings for integrated peripherals.

Power Management Setup

Use this menu to specify your settings for power management.

PnP/PCI Configurations

This menu is valid only if your system supports PnP/PCI.

PC Health Status

This menu shows the current status of your PC.

Load Fail-Safe Defaults

Use this menu to load Fail-Safe defaults into BIOS for the most stable, and minimal-performance system operations.

Load Optimized Defaults

Use this menu to load factory settings into BIOS for optimal-performance system operations.

Set Administrator Password

Use this menu to set Administrator password.

Set User Password

Use this menu to set user password.

Save & Exit Setup

Save all changes to the CMOS and exit BIOS Setup.

Exit Without Saving

Abandon all changes to the CMOS and exit BIOS Setup.

The following figure shows the items of Standard CMOS Features menu, which may exclude any modifiable subitem or contain one or more modifiable subitems. Use arrow keys to select the items to be modified and <PgUp> or <PgDn> key to select desired settings.

Phoenix – AwardBIOS CMOS Setup Utility

Standard CMOS Features

Date (mm:dd:yy) Thu, Dec 3 2009	Item Help
Time (hh:mm:ss) 14 : 31: 6	
►IDE Channel 0 Master [None]	Menu Level►
►IDE Channel 0 Slave [None]	Change the day, month, year and century
►IDE Channel 1 Master [None]	
►IDE Channel 1 Slave [None]	
Video [EGA/VGA]	
Halt On [All, But Keyboard]	
Base Memory 639K	
Extended Memory 1038336K	

Total Memory	1039360K	

↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

Date

This item allows you to set a desired system date (usually current date). The date format is <day><month><date><year>.

Day It is a read-only and bios-defined weekday attribute ranging from Sun (Sunday) to Sat (Saturday).

Month It is a month attribute ranging from Jan (January) to Dec (December).

Date It is a date attribute ranging from 1 to 31 and can be modified via numeric keys.

Year It is a user-defined year attribute.

Time

This item allows you to set a desired system time (usually current time). The time format is <hour><minute><second>.

Channel 0 Master / Channel 0 Slave

Channel 1 Master / Channel 1 Slave

Press PgUp/<+> or PgDn/<-> key to select among Manual, None and Auto type. Note that the specification of your drive device must be in compliance with the contents of Drive Table. If the information registered in this item is not correct, your hard disk will not work properly; if your hard disk specification is not found or does not conform to or the Driver Table, you may select Manual type to set the specification manually.

If you choose Manual, you will be requested to enter relevant information in the following entries. Keyboard input is also supported. For details, you may refer to the instructive materials provided by distributor or device manufacturer.

If a SCSI HDD device is used, set this item to "NONE".

If a CD-ROM drive is connected to the HDD port, set this item to "NONE"

AccessMode Options are: Auto, Normal, Large and LBA

Cylinder Number of cylinders

Head Number of heads

Precomp Write precompensation cylinder

Landing Zone Head landing zone

Halt on

The item allows you to determine when the system will stop. Options are: No Errors; All Errors; All, But Keyboard.

No Errors	The system boot will not stop for any error.
All Errors	Whenever the BIOS detects a non-fatal error, the system boot will stop.
All, But Keyboard	The system boot will not stop for a keyboard error but stop for all other errors as detected by BIOS. (default)

4.3 Advanced BIOS Features

Phoenix – AwardBIOS CMOS Setup Utility

Advanced BIOS Features

►CPU Feature	[Press Enter]	
►Hard Disk Boot Priority	[Press Enter]	Item Help
Virus Warning	[Disabled]	
CPU L1 & L2 Cache	[Enabled]	Menu Level►
Hyper-Threading Technology	[Enabled]	
Quick Power On Self Test	[Enabled]	
First Boot Device	[Removable]	
Second Boot Device	[Hard Disk]	
Third Boot Device	[CDROM]	
Boot Other Device	[Enabled]	
Boot Up NumLock Status	[On]	
Gate A20 Option	[Fast]	
X APIC Mode	[Enabled]	
MPS Version Control For OS	[1.4]	
OS Select For DRAN > 64MB	[Non-OS2]	
Small Logo [EPA] Show	[Disabled]	
Security Option	[Setup]	

↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

CPU Feature

The item has the following options:

Delay Prior To Thermal [16 Min] (This item allows you to set the duration of entering CPU thermal throttling.)

C1E Function [Auto] CPU Power-saving State Enable Control

CPU C State Capability [C1] CPU Power-saving State Control
Execute Disable Bit [Enable] (Virus Protection Technology)

Hard Disk Boot Priority (IDE Storage Device Boot Priority)

This item is used to specify boot priority of IDE devices. Press "Enter" key for detailed setting.

Virus Warning

This item has two options: "Disabled" and "Enabled".

CPU L1 & L2 Cache

This item can be used to enable or disable the CPU's primary (L1) or secondary (L2) cache. If set to Enabled, operating speed of PC will be increased remarkably; if set to Disabled, the function will be inactivated.

Hyper-Threading Technology

Enable and disable Intel's hyper-threading technology.

Quick Power On Self Test

This item is used to accelerate Power On Self Test (POST) process. If set to Enabled, BIOS will shorten or skip some of its tests.

Enabled (default)	Quick POST
Disabled	Normal POST

First/Second/Third/Boot Other Device

BIOS will load the operating system according to the boot order of available devices. If disabled, the function will be inactivated.

Boot Up NumLock Status (Default: On)

On (default)	Keypad numeric keys remain valid
Off	Keypad arrow keys remain valid

Gate A20 Option

Normal	Gate A20 signal is controlled by keyboard controller or chipset hardware.
Fast (default)	Gate A20 signal is controlled by port 92 or specific programs of chipset.

APIC Mode

It refers to an advanced interrupt controller mode to meet the requirements of multi-core CPU.

MPS Version Control For OS

This item is used to specify the multiprocessor specification version of the system. It is recommended to keep the default value (1.4).

OS Selection for DRAM > 64MB

You must only select OS/2 when installing an OS/2 operating system with a RAM greater than 64MB. The options are: Non-OS/2 (default) and OS/2.

Small Logo [EPA] Show

This item is used to determine whether the Energy Star Logo will be displayed during POST. The options are: "Disabled" and "Enabled".

Security Option

Such option allows users to set access restrictions to both system and **Setup** utility, or just **Setup** utility.

System	If one fails to enter a valid password in the popup box, the system will not boot up and the Setup utility will not be accessible.
Setup (default)	If one fails to enter a valid password in the popup box, the system will boot up as usual, but the Setup utility will not be accessible.

4.4 Advanced Chipset Features Setup

Advanced Chipset Features Setup is used to change the values of chipset registers that control most options of computer.

Select ADVANCED CHIPSET FEATURES in the main menu, and the following screen will be displayed.

Phoenix – AwardBIOS CMOS Setup Utility

Advanced Chipset Features

DRAM Timing Selectable [By SPD]	Item Help
X CAS Latency Time Auto	
X DRAM RAS# to CAS# Delay Auto	Menu Level►
X DRAM RAS# Precharge Auto	
X Precharge Delay (tRAS) Auto	
X System Memory Frequency Auto	
SLP_S4# Assertion Width [1 to 2 Sec.]	
System BIOS Cacheable [Enabled]	
Video BIOS Cacheable [Disabled]	
Memory Hole At 15M-16M [Disabled]	
►PCI Express Root Port Func [Press Enter]	
** Onboard VGA Setting **	
On-Chip Frame Buffer Size [8MB]	
DVMT Mode [DVMT]	
DVMT/Fixed Memory Size [128MB]	
Boot Display [VBIOS Default]	
LCD Panel Type [LVDS1 18 1024 X 768]	
LVDS1 Panel Brightness [Level 10]	

↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help

F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

Note: If you are not familiar with chipset, never modify these settings at will.

DRAM Timing Selectable

Two options are available.

Manual (Manual setup)

By SPD (DRAM timing is set automatically according to memory SPD data)
When selecting Manual, the following five items are configurable; when selecting By SPD, the following five items are not configurable.

CAS Latency Time

Once a SDRAM is installed, the clock latency will be determined by DRAM clock settings. The options are: 5, 4, 3 and Auto.

DRAM RAS-to-CAS Delay

You may set the delay period between CAS and RAS signal for DRAM read & write or refreshing. Shorter delay means quicker response, while longer delay means more stable performance. Options are: 2, 3, 4, 5, 6 and Auto.

DRAM RAS Precharge

If number of cycles is not sufficient enough to ensure that RAS saves its instructions before DRAM refreshing, it may cause incomplete refreshing and the DRAM will fail to maintain its data. Faster precharge means quicker response, while slower precharge means more stable performance. This item is only valid when a SDRAM is installed.

Options are: 2, 3, 4, 5, 6 and Auto.

Precharge Delay (t RAS)

Options are: Auto and 4~15.

System Memory Frequency

Options are: Auto, 533 and 667(MHz).

SLP_S4# Assertion Width

Four options are available: 4 to 5 Sec.
3 to 4 Sec.
2 to 3 Sec.
1 to 2 Sec.

System BIOS Cacheable

If set to Enabled, the feature will enable the caching of BIOS ROM at F0000h-FFFFFh for better system performance. However, if any program writes into this memory area, it will result in a system error. Options are: Enabled and Disabled.

Video BIOS Cacheable

If set to Enabled, the feature will enable the caching of video BIOS ROM for better system performance. However, if any program writes into this memory area, it will result in a system error. Options are: Enabled and Disabled.

Memory Hole At 15M-16M

This feature will decrease your memory by 1M and allow the few old ISA cards that require this memory to work properly on your system. Options are: Enabled and Disabled.

PCI Express Root Port Func

This item is used to configure PCI-E slot. For motherboards not equipped with PCI-E slot, such configuration is not required. If set to Disabled, the slot and slot device will be disabled. For example, onboard network adapter card can be disabled or enabled via PCI-E slot 1.

On-Chip Frame Buffer Size

This feature controls the amount of video memory allocated to integrated graphic card. The system memory can be used as video memory.

DVMT Mode

Three options are available: "FIXED", "DVMT" and "Both (FIXED+DVMT)".

When set to "FIXED" mode, a fixed portion of the system memory will be allocated to GPU. Two allocation sizes are available: 64MB and 128MB.

When set to "DVMT" Mode, the system will dynamically allocate system memory to GPU. In this mode, up to 224MB of system memory can be allocated.

When set to "Both(FIXED+DVMT)" mode, the system will allocate a fixed memory of 64MB as dedicated graphic memory, as well as allow a memory of 64MB to be dynamically allocated between GPU and operating system.

DVMT/FIXED Memory Size

Refer to the previous item.

Boot Display

This feature is to select desired display device. VBIOS, LVDS1, VGA+LVDS1, LCDS2 and VGA+LVDS2 can be selected as display device.

LCD Panel Type (LVDS Panel Type)

This feature is to select between LVDS1 and LVDS2. When selecting LVDS panel, users should be informed of LVDS panel types supported by the motherboard. The following options are available:

LVDS1 18	800X600
LVDS1 18	1024X768
LVDS1 18*2	1280X1024
LVDS1 18*2	1440X900
LVDS1 18*2	1400X1050
LVDS1 18*2	1600X1200
LVDS1 18	1280X800

LVDS1 18 1280X768
LVDS2 24 1024X768
LVDS2 24*2 1280X1024
LVDS2 24*2 1440X900
LVDS2 24*2 1920X1080

Note: Due to limited address length of BIOS, only a portion of panel parameters are listed in BIOS Setup. If the connected panel is not included in the parameter list, display problem will occur. In this case, we need to adjust BIOS setup.

LVDS1 Panel Brightness

This feature provides adjustable brightness control: LEVEL3~10.

Note: This feature is valid only when the panel supports PWM function.

4.5 Integrated Peripherals

Phoenix – AwardBIOS CMOS Setup Utility

Integrated Peripherals

► OnChip IDE Device	[Press Enter]	Item Help
► Onboard Device	[Press Enter]	
► Super IO Device	[Press Enter]	Menu Level►

↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

Select "OnChip IDE Device" item and press "Enter" for setup of IDE devices, as shown by the following figure:

Phoenix – AwardBIOS CMOS Setup Utility

OnChip IDE Device

IDE HDD Block Mode	[Enabled]	Item Help
IDE DMA Transfer access	[Enabled]	
On-Chip Primary PCI IDE	[Enabled]	Menu Level►
IDE Primary Master PIO	[Auto]	
IDE Primary Slave PIO	[Auto]	
IDE Primary Master UDMA	[Auto]	
IDE Primary Slave UDMA	[Auto]	
On-Chip Secondary PCI IDE	[Enabled]	
IDE Secondary Master PIO	[Auto]	
IDE Secondary Slave PIO	[Auto]	
IDE Secondary Master UDMA	[Auto]	
IDE Secondary Slave UDMA	[Auto]	
*** On-Chip Serial ATA Setting ***		
X SATA Mode	IDE	

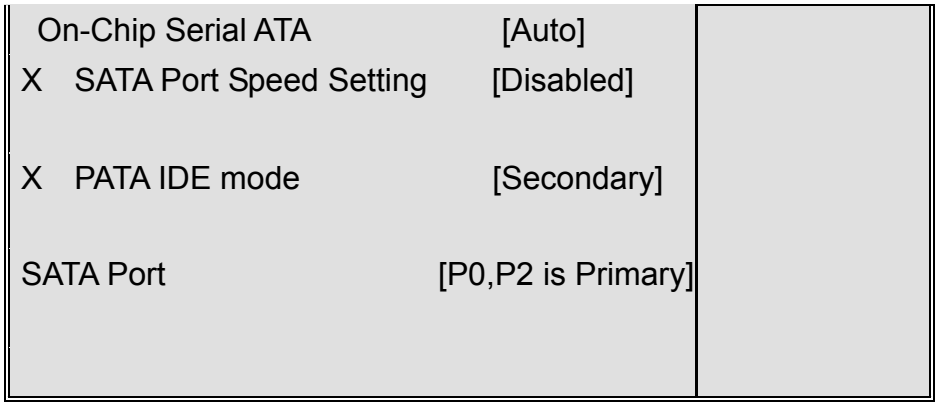
On-Chip Serial ATA [Auto]
X SATA Port Speed Setting [Disabled]
X PATA IDE mode [Secondary]
SATA Port [P0,P2 is Primary]
↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

IDE HDD Block Mode

If your IDE hard disk supports Block mode (most current hard disk products support the feature), select Enabled and BIOS will automatically detect optimum block mode supported by the hard disk. This will improve the transfer performance of hard disk. Options are: **Enabled** and Disabled.

IDE DMA Transfer Access

Options are: **Enabled** and Disabled.

On-Chip Primary/Secondary PCI IDE

Each IDE port of integrated peripheral controller supports up to 2 IDE channels. Select Enabled to activate each channel. Options are: **Enabled** and Disabled.

IDE Primary /Secondary Master/Slave PIO

The four IDE PIO (Programmed Input/Output) fields allow you to set a PIO mode (0-4) for each of the four IDE devices that the onboard IDE interface supports. Mode 0 through 4 provides successively increased performance. In Auto mode, the system automatically determines the best mode for each device. Options are: **Auto**, Mode 0, Mode 1, Mode 3 and Mode 4.

IDE Primary /Secondary Master/Slave UDMA

Ultra DMA implementation is possible only if your IDE hard disk supports it and the operating environment includes a DMA driver (Windows 95 OSR2 or a third-party IDE bus mastering driver). If your hard disk and system software both support Ultra DMA/33, Ultra DMA/66 and Ultra DMA/100, select Auto to enable BIOS support. Options are: **Auto** and Disabled.

On-Chip Serial ATA

The following five options are available:

Disabled (Disable SATA controller)

Auto (Allocate SATA/IDE devices automatically)

Combined Mode (IDE+SATA Combo Mode)

Enhanced Mode

SATA Only

SATA PORT Speed Setting

Three options are available:

Disabled (Disable the feature)

Force GEN I (Enhance transfer speed to 1.5Gb/s, i.e., 150MB/s)

Force GEN II (Enhance transfer speed to 3.0Gb/s, i.e., 300MB/s)

PATA IDE Mode

The item allows you to configure PATA IDE mode. Setup option: "Secondary",

Select "Onboard Device" item and press "Enter" for setup of onboard devices, as shown by the following figure:

Phoenix – AwardBIOS CMOS Setup Utility

Onboard Device

USB Controller	[Enabled]	Item Help
USB 2.0 Controller	[Enabled]	
USB Keyboard Support	[Enabled]	Menu Level►
USB Mouse Support	[Enabled]	
Azalia/AC97 Audio Select	[Auto]	

↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help

F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

USB Controller

This item allows you to enable or disable onboard USB controller. Options are**: Enabled** and

Disabled.

USB 2.0 Controller

This item allows you to enable or disable USB 2.0 feature of onboard USB controller. Options are**:** **Enabled** and Disabled.

USB Keyboard Support

This item determines if USB keyboard is supported in MS DOS. Options are**: Enabled** and Disabled.

USB Mouse Support

This item determines if USB mouse is supported in MS DOS. Options are**: Enabled** and Disabled.

Azalia/AC97 Audio Select

This item is used to select Audio mode.

Select "Super IO Device" item and press "Enter" for setup of Super IO devices, as shown by the following figure:

Phoenix – AwardBIOS CMOS Setup Utility
Super IO Device

Onboard Parallel Port [378/IRQ7]	Item Help
Parallel Port Mode [Standard]	
X ECP Mode Use DMA 3	Menu Level►
Onboard Serial Port 1 [3F8/IRQ4]	
Onboard Serial Port 2 [2F8/IRQ3]	
UART2 Mode Select [Normal]	
X RXD , TXD Active Hi, Lo	
X IR Transmission Delay Enabled	
X UART2 Duplex Mode Half	
X Use IR Pins IR-Rx2Tx2	
Onboard Serial Port 3 [3E8/IRQ4]	

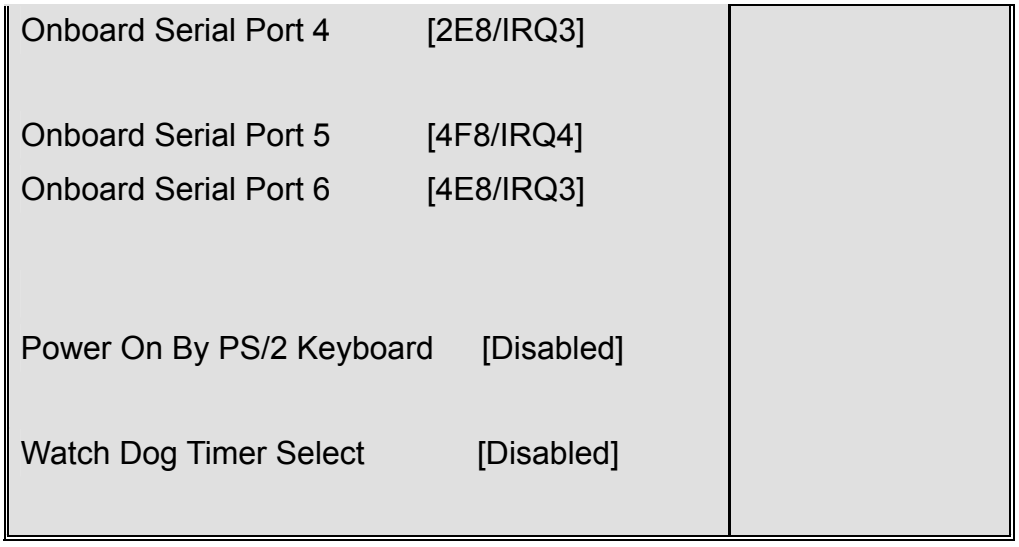
Onboard Serial Port 4 [2E8/IRQ3]
Onboard Serial Port 5 [4F8/IRQ4]
Onboard Serial Port 6 [4E8/IRQ3]
Power On By PS/2 Keyboard [Disabled]
Watch Dog Timer Select [Disabled]
↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

Onboard Parallel Port

This item allows you to determine the I/O address and corresponding interrupts for the onboard parallel port LPT. Options are: Disabled, **378/IRQ7**, 278/IRQ5 and 3BC/IRQ7.

Onboard Serial Port 1/2/3/4

These four selection fields allow you to select the I/O address and corresponding interrupts for serial port COM1/2/3/4. Options are: Disabled, 3F8/IRQ4, 2F8/IRQ3, 3E8/IRQ4 and 2E8/IRQ3.

Onboard Serial Port 5/6

These two selection fields allow you to select the I/O address and corresponding interrupts for serial port COM5/6. Options are: Disabled, 4F8/IRQ4 and 4E8/IRQ3.

UART Mode Select

Generally, Onboard Serial Port 2 of motherboard can also be used as infrared port. This item allows you to determine whether Onboard Serial Port 2 is used as normal serial port or infrared port. Four options are available:

Normal (used as serial port)
IrDA (used as standard infrared port)
ASKIR (used as responder infrared port)

UR2 Duplex Mode

This item will be set to Half Duplex (Half) mode unless your infrared device supports Full Duplex (Full) mode.

Power On By PS/2 Keyboard

Three options are available:

Disabled

Any key
Keyboard 98

Watch Dog Timer Select

Eight options are available: **Disabled**, 10Sec, 20Sec, 30Sec, 40Sec, 1Min, 2Min and 4Min

4.6 Power Management Setup

Power Management Setup allows you to configure your system to ensure an enhanced power-saving effect when user is compliant with system mode.

Phoenix – AwardBIOS CMOS Setup Utility

Power Management Setup

Power Status After AC Fail	[Former Status]	
▲		Item Help
ACPI Function	[Enabled]	
Power Management	[User Define]	Menu Level►
Video Off Method	[DPMS]	
Video Off In Suspend	[Yes]	
Suspend Type	[Stop Grant]	
MODEM Use IRQ	[3]	
Suspend Mode	[Disabled]	
HDD Power Down	[Disabled]	
Soft-Off by PWR-BTTN	[Instant-Off]	
Wake-Up by PCI card	[Enabled]	
Power on by Ring	[Enabled]	
Resume by Alarm	[Disabled]	
X Date{Of Month} Alarm	0	
X Time{hh:mm:ss} Alarm	0 : 0 : 0	
** Reload Global Timer Events **		
Primary IDE 0	[Disabled]	
Primary IDE 1	[Disabled]	
Secondary IDE 0	[Disabled]	
Secondary IDE 0	[Disabled]	
FDD,COM,LPT Port	[Disabled]	
PCI PIRQ[A-D]#	[Disabled]	

↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help

F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

PWR Status After PWR Fail

Three options are available:

Former Status (restore to former status)

Turn On (start up when power is restored)

Keep Off (remain powered off)

ACPI Function

This item allows you to enable/disable ACPI functions. Options are: **Enabled** and Disabled.

Power Management

This category allows you to select the type (or degree) of power saving and gives you direct assess to the following modes:

1. Suspend Mode
2. HDD Power Down

Three options are available for Power Management, including two fixed modes.

User Define---It allows you to set each mode individually. When not disabled, each of the ranges is from 1min to 15min.

Min Saving---Minimum power management. Suspend Mode=1hr and HDD Power Down=15min.

Max Saving---Maximum power management. Suspend Mode=1min and HDD Power Down=1min.

Video Off Method

This item determines the display type of monitor.

V/HSYNC+Blank	This option turns off the vertical and horizontal synchronization ports and writes blanks to the video buffer.
Blank Screen	This option only writes blanks to the video buffer.
DPMS	This option controls initial display of power management signal.

Video Off In Suspend

This item determines the display type to be cleared by monitor.

Options are: **Yes** and No.

Suspend Type

This item is used to select suspend type. Options are: PWRON Suspend and **Stop Grant**.

Modem Use IRQ

This item determines the IRQ used by Modem.

Options are: **3**, 4, 5, 67, 9, 10, 11 and NA.

Suspend Mode

When enabled, after the set time of system inactivity, all devices except the CPU will be shut off. Options are: 1/2/4/8/12/20/30/40Min, 1Hour and **Disabled**.

HDD Power Down

When enabled and after the set time of system inactivity, the hard disk will be powered down while all other devices remain active. Options are: 1/2/3/4/5/6/7/8/9/10/11/12/13/14/15Min and **Disabled.**

Soft-Off by PWR-BTTN

Pressing the power button for more than 4 seconds forces the system to enter the Soft-Off state. Options are: Delay4Sec and **Instant-Off**.

Wake-Up by PCI card

This item allows the system to be awakened by peripheral device connected to PCI card. Options are: **Enabled** and Disabled.

Power On by Ring

When set to Disabled, the system will ignore any incoming Modem ring; when set to **Enabled**, the system will be automatically started up in case of incoming Modem ring.

Resume by Alarm

This feature determines whether to power on the system at a desired time. When set to Disabled, the feature is inactivated; when set to **Enabled**，date and time of power on can be set:

Date(of month) Alarm Turn on the system at a specific time on each day or on a specific day in a month. If set to **0**，the system will be powered on once every day.

Time(hh:mm:ss) Alarm Set the time (hh:mm:ss) at which the system will be powered on automatically.

Note: You must restart the system after changing relevant settings, or the setting may not be effective.

**** Reload Global Timer Events ****

This module contains six modules, all of which are provided with two options: Enable and Disable. If set to Enable, the system will be awakened from sleep status when specific event occurs.

4.7 PnP/PCI Configurations Setup

This part describes configurations to be made on PCI bus system. PCI, namely Personal Computer Interconnect, is a computer bus that allows I/O device to operate nearly as fast as CPU in its own way. Some technical terms will be mentioned here. We recommend that non-professional users not make changes from factory default settings.

Phoenix – AwardBIOS CMOS Setup Utility
PNP/PCI Configurations

Init Display First [PCI Slot]	Item Help
Reset Configuration Data [Disabled]	
Resources Controlled By [Auto(ESCD)]	Menu Level
X IRQ Resources Press Enter	
PCI/VGA Palette Snoop [Disabled]	
** PCI Express Relative Items **	
Maximum Payload Size [128]	

↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

Init Display First

PCI Slot (PCI display device)
Onboard (Onboard display device)
PCiEx (PCIE device)

Reset Configuration Data

Normally, you should set this item to Disabled. If you have installed a new add-on and the system reconfiguration has caused such a serious conflict that the operating system cannot boot up, then

select Enabled. This will reset the Extended System Configuration Data (ESCD) after exiting from Setup. Options are: Enabled and **Disabled.**

Resource Controlled By

Award Plug and Play BIOS has the capacity to automatically configure all of the boot and Plug and Play compatible devices. However, this capability means absolutely nothing unless you are using a Plug and Play operating system such as Windows®95/98. If set to Manual, you may have access into each submenu under this item (each submenu begins with "➢") and select specific resource manually. Options are: **Auto(ESCD)** and Manual.

IRQ Resources

This item determines whether IRQ interrupt is assigned to Plug-and-Play device or Non-Plug-and-Play ISA device.

PCI/VGA Palette Snoop

This item should be left Disabled. Options are: Enabled and **Disabled**.

**** PCI Express Relative Items ****

Maximum Payload Size [128]

This item allows you to configure maximum payload size of TLP (Transition Layer Packet). Options are: [128], [256], [512], [1024], [2048] and [4096].

4.8 PC Health Status

This item shows the current operation status of system.

Phoenix – AwardBIOS CMOS Setup Utility

PC Health Status

** Smart Fan Control（Thermal Cruise） **	Item Help
CPU Fan Cruise Target [65℃/149℉]	
Fan Cruise Threshold [5℃]	Menu Level ►
** Onboard Health Sensor Status**	
Current System Temperature	
Current CPU Temperature	
CPU Fan Speed	
Vcore(V)	
5Vcc (V)	
Vbat (V)	
5Vsb(V)	

↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

This module mainly shows motherboard information on current operating voltage, CPU temperature, system temperature and fan rotation speed. Refer to actual screen for name of each column.

CPU Fan Cruise Target/Fan Cruise Threshold: this item determines the rotation condition of fan when CPU temperature reaches preset value. Options of CPU Fan Cruise Target are: Disable, 55℃/131℉, 60℃/140℉ and **65℃/149℉**; Options of Fan Cruise Threshold are ±2℃, ±3℃, ±4℃ and **±5**℃.

For example, set CPU Fan Cruise Target to <65℃/149℉> and Fan Cruise Threshold to <±5℃>. When CPU temperature rises to 70℃ (65℃+5℃), the fan will begin to rotate; when CPU temperature drops to 60℃ (65℃-5℃), the fan will stop rotating.

4.9 Load Fail-Safe/Optimized Defaults

These two items allow users to load fail-safe or optimized defaults to restore BIOS. Optimized defaults refer to the specific values set by motherboard manufacturer for optimized performance, while fail-safe defaults stand for settings made by BIOS distributor for stable performance.

If you select Load Fail-Safe Defaults, the following information will be shown:

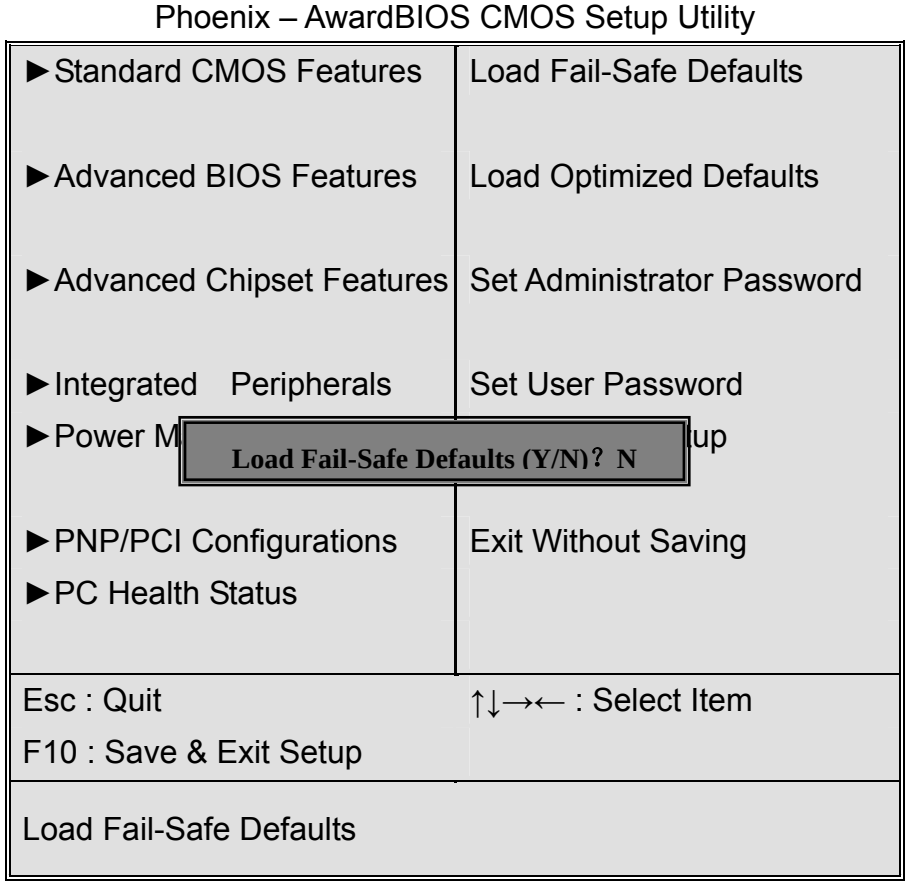

Press **Y** to load **BIOS** defaults for stable, but lower performance.

If you select **Load Optimized Defaults**, the following information will be shown:

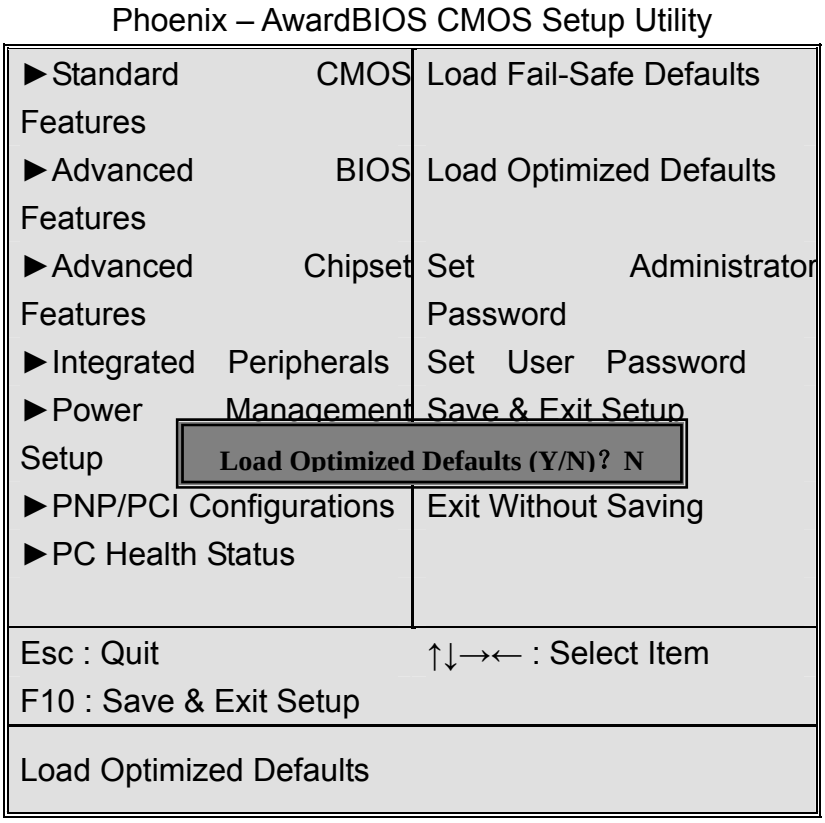

Press **Y** to load factory settings delivering optimized performance.

4.10 Set Administrator/User Password

When selecting this feature, the following information will be shown:

Phoenix – AwardBIOS CMOS Setup Utility

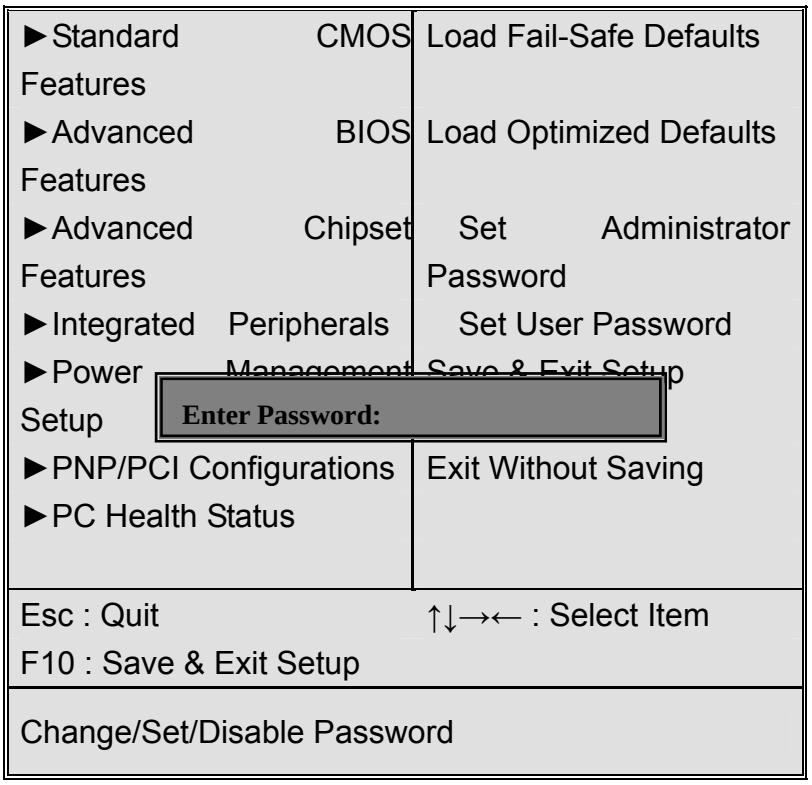

Type the password with up to 8 characters and then press ≺Enter≻ key. This will clear all previously typed CMOS passwords. You will be requested to confirm the password. Type the password again and press ≺Enter≻ key. You may press ≺Esc≻ key to abandon password entry operation.

To clear the password, just press ≺Enter≻ key when password input window pops up. A confirmation message will be shown on the screen as to whether the password will be disabled. You will have direct access to BIOS setup without typing any password after system reboot once the password is disabled.

Once the password feature is used, you will be requested to type the password each time you enter BIOS setup. This will prevent unauthorized persons from changing your system configurations.

Also, the feature is capable of requesting users to enter the password prior to system boot to control unauthorized access to your computer. Users may enable the feature in Security Option of Advanced BIOS Features. If Security Option is set to System, you will be requested to enter the password before system boot and when entering BIOS setup; if Security Option is set to Setup, you will be requested for password for entering BIOS setup.

4.11 Save & Exit Setup

When selecting this item, the following information will be shown:

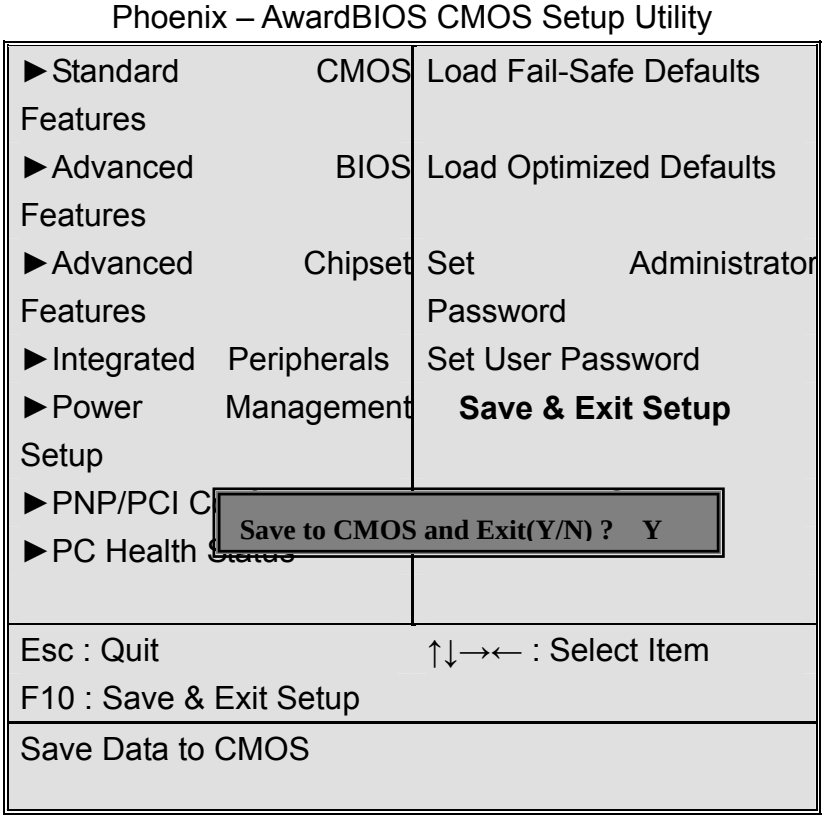

Press **Enter** key to save the changes and exit from BIOS setup.

4.12 Exit Without Saving

When selecting this item, the following information will be shown:

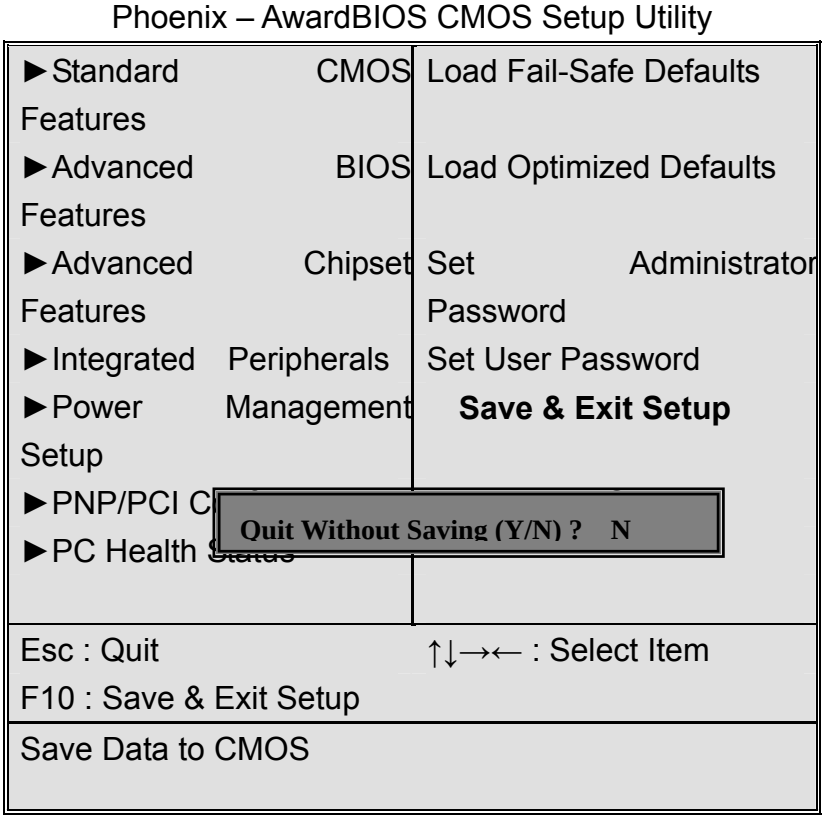

Press **Y** and then **Enter** key to exit from BIOS setup without saving the changes.

Chapter 5

This chapter describes the installation procedures for software and drivers under the windows XP. The software and drivers are included with the motherboard. The contents include **Intel chipset driver VGA driver LAN drivers Audio driver**
Installation instructions are given below.

Important Note:
After installing your Windows operating system (Windows XP), you must install first the Intel Chipset Software Installation Utility before proceeding with the installation of drivers.

5.1 Intel Chipset Driver

To install the Intel chipset driver, please follow the steps below.

Step 1: Select Chipset from the list

Follow the step-by-step installation process to install the chipset driver.

Intel® Chipset Device Software
Intel® Chipset Device Software
intel
Welcome to the Setup Program
This setup program will install the Intel® Chipset Device Software onto this computer. It is strongly recommended that you exit all Windows* programs before continuing.
< Back
Next >
Cancel
Intel® Installation Framework

Intel® Chipset Device Software
Intel® Chipset Device Software
License Agreement
intel
You must accept all of the terms of the license agreement in order to continue the setup program. Do you accept the terms?
INTEL SOFTWARE LICENSE AGREEMENT (OEM / IHV / ISV Distribution & Single User)
IMPORTANT - READ BEFORE COPYING, INSTALLING OR USING.
Do not use or load this software and any associated materials (collectively, the "Software") until you have carefully read the following terms and conditions. By loading or using the Software, you agree to the terms of this Agreement. If you do not wish to so agree, do not install or use the Software.
Please Also Note:
* If you are an Original Equipment Manufacturer (OEM), Independent Hardware Vendor (IHV), or Independent Software Vendor (ISV), this complete LICENSE AGREEMENT applies;
< Back
Yes
No
Intel® Installation Framework

Intel® Chipset Device Software
Intel® Chipset Device Software
Readme File Information
intel
Refer to the Readme file below to view the system requirements and installation information.
Press the Page Down key to view the rest of the file.
****
* Product: Intel(R) Chipset Device Software
* Release: Production Version
* Version: 9.1.1.1019
* Target Chipset#: Intel(R) 5 Series/3400 Series Chipse
* Date: August 18 2009
****
< Back
Next >
Cancel
Intel® Installation Framework

Intel® Chipset Device Software
Intel® Chipset Device Software
Setup Progress
Please wait while the following setup operations are performed:
Installing Driver: Intel(R) N10/ICH7 Family USB2 Enhanced Host Controller - 27CC
Version: 9.1.1.1016
Installing Driver: Intel(R) ICH7M/U LPC Interface Controller - 27B9
Version: 9.1.1.1016
Installing Driver: Intel(R) N10/ICH7 Family PCI Express Root Port - 27D0
Version: 9.1.1.1016
Installing Driver: Intel(R) N10/ICH7 Family PCI Express Root Port - 27D2
Version: 9.1.1.1016
Installing Driver: Intel(R) N10/ICH7 Family SMBus Controller - 27DA
Version: 9.1.1.1016
Click Next to continue.
Next
Intel® Installation Framework

Intel® Chipset Device Software
Intel® Chipset Device Software
Setup Is Complete
You must restart this computer for the changes to take effect. Would you like to restart the computer now?
Yes, I want to restart this computer now.
No, I will restart this computer later.
Click Finish, then remove any installation media from the drives.
Finish
Intel® Installation Framework

Click Finish, When the installation process is complete, the Setup Complete screen appears. See as picture.

5.2 Intel Graphics Media Accelerator Driver

To install the VGA drivers, follow the steps below to proceed with the installation.

1. Click Intel(R) Chipset Family Graphics Driver.

Follow the step-by-step installation process to install the Graphics Media Accelerator driver.

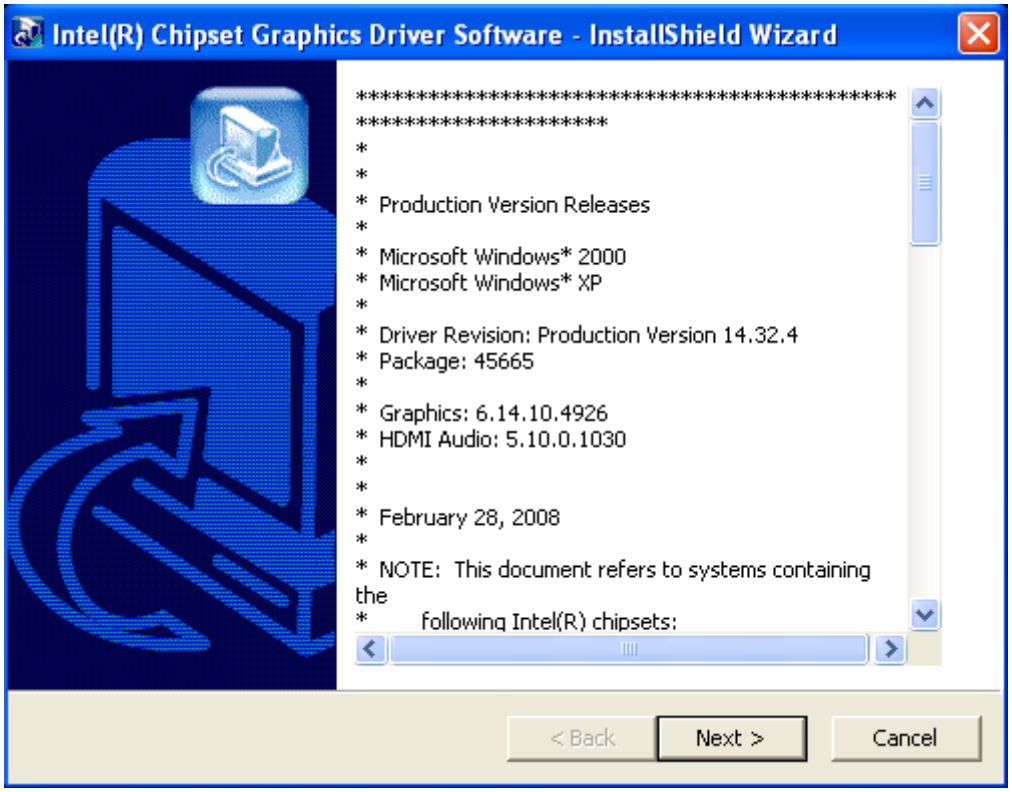
Intel(R) Chipset Graphics Driver Software - InstallShield Wizard
****
* Production Version Releases
* Microsoft Windows* 2000
* Microsoft Windows* XP
* Driver Revision: Production Version 14.32.4
* Package: 45665
* Graphics: 6.14.10.4926
* HDMI Audio: 5.10.0.1030
* February 28, 2008
* NOTE: This document refers to systems containing the
* following Intel(R) chipsets:
< Back
Next >
Cancel

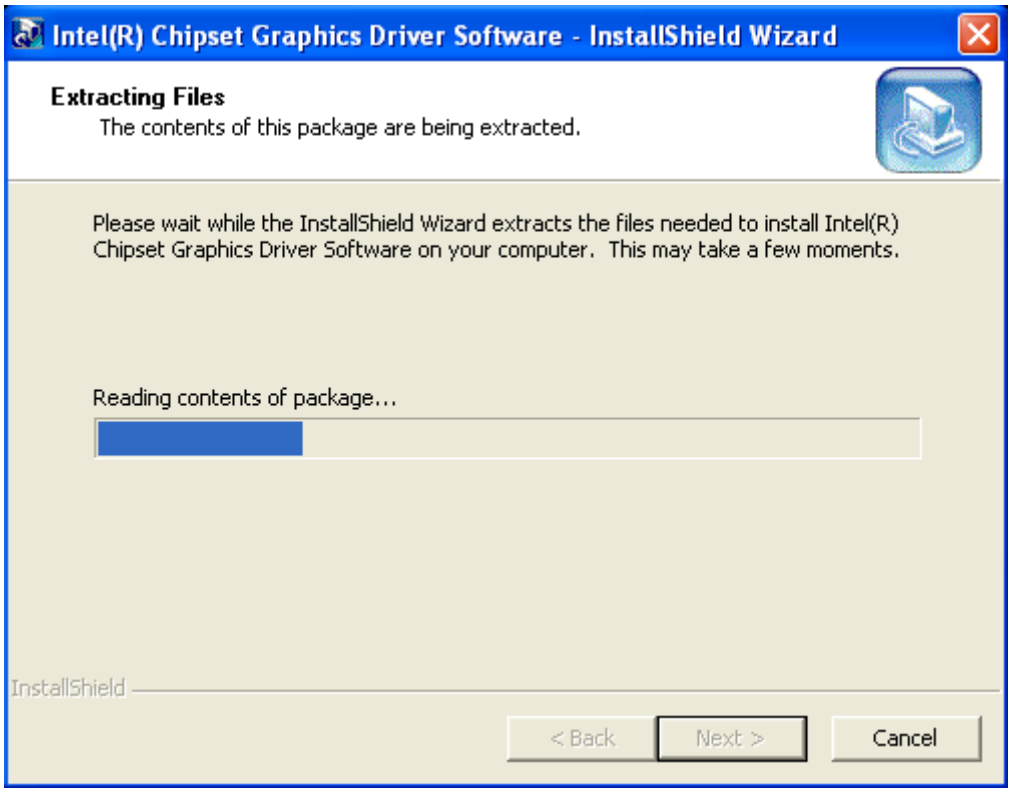
Intel(R) Chipset Graphics Driver Software - InstallShield Wizard
Extracting Files
The contents of this package are being extracted.
Please wait while the InstallShield Wizard extracts the files needed to install Intel(R) Chipset Graphics Driver Software on your computer. This may take a few moments.
Reading contents of package...
InstallShield
< Back
Next >
Cancel

Intel® Graphics Media Accelerator Driver
Intel® Graphics Media Accelerator Driver
intel
Welcome to the Setup Program
This setup program will install the Intel® Graphics Media Accelerator Driver onto this computer. It is strongly recommended that you exit all programs before continuing. Click Next to continue.
< Back
Next >
Cancel
Intel® Installation Framework

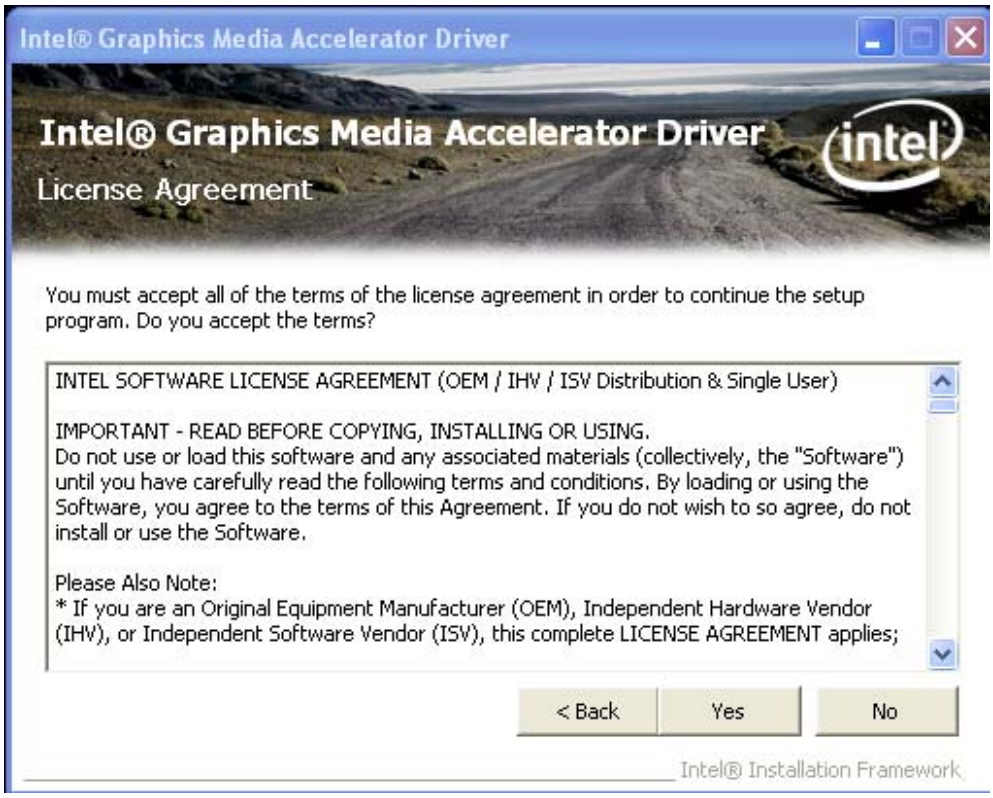
Intel® Graphics Media Accelerator Driver
Intel® Graphics Media Accelerator Driver
License Agreement
intel
You must accept all of the terms of the license agreement in order to continue the setup program. Do you accept the terms?
INTEL SOFTWARE LICENSE AGREEMENT (OEM / IHV / ISV Distribution & Single User)
IMPORTANT - READ BEFORE COPYING, INSTALLING OR USING.
Do not use or load this software and any associated materials (collectively, the "Software") until you have carefully read the following terms and conditions. By loading or using the Software, you agree to the terms of this Agreement. If you do not wish to so agree, do not install or use the Software.
Please Also Note:
* If you are an Original Equipment Manufacturer (OEM), Independent Hardware Vendor (IHV), or Independent Software Vendor (ISV), this complete LICENSE AGREEMENT applies;
< Back
Yes
No
Intel® Installation Framework

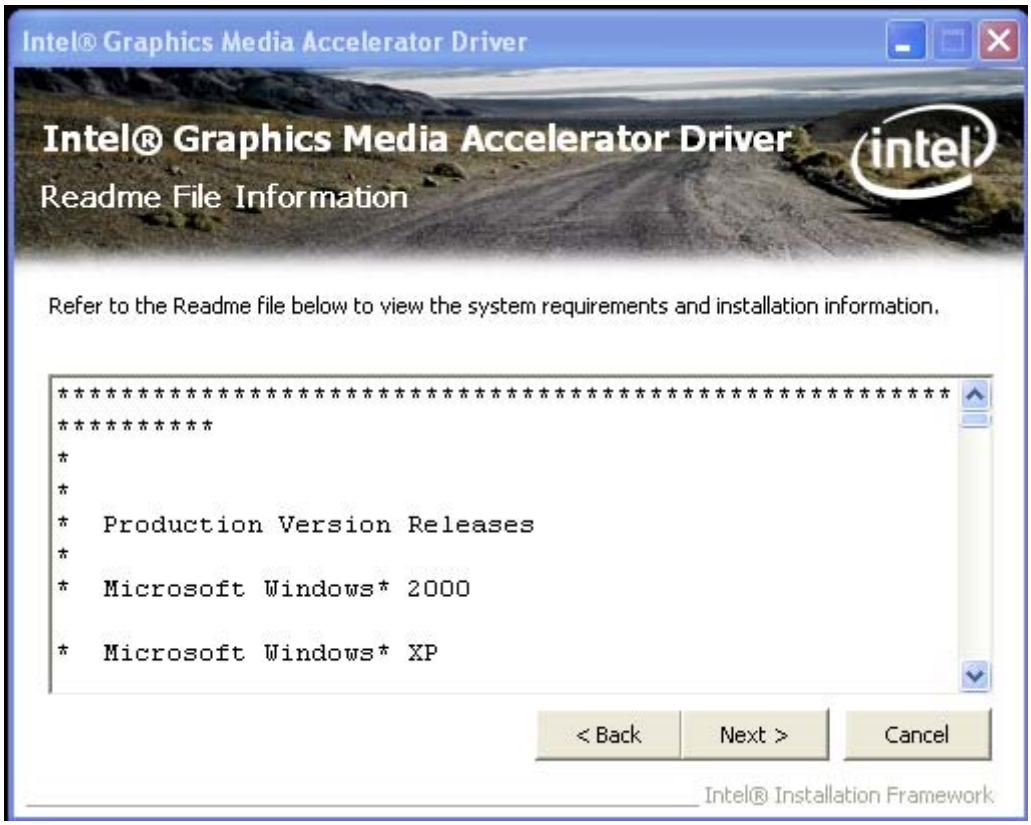
Intel® Graphics Media Accelerator Driver
Intel® Graphics Media Accelerator Driver
Readme File Information
intel
Refer to the Readme file below to view the system requirements and installation information.
****
*
*
* Production Version Releases
*
* Microsoft Windows* 2000
* Microsoft Windows* XP
< Back
Next >
Cancel
Intel® Installation Framework

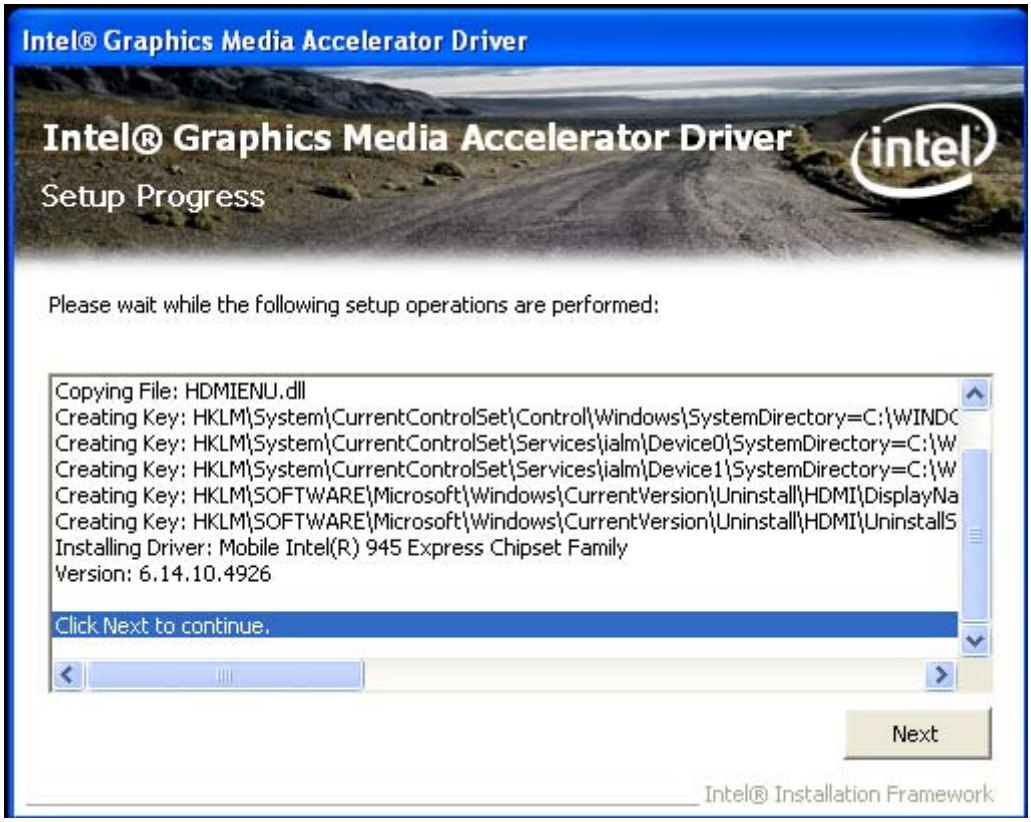

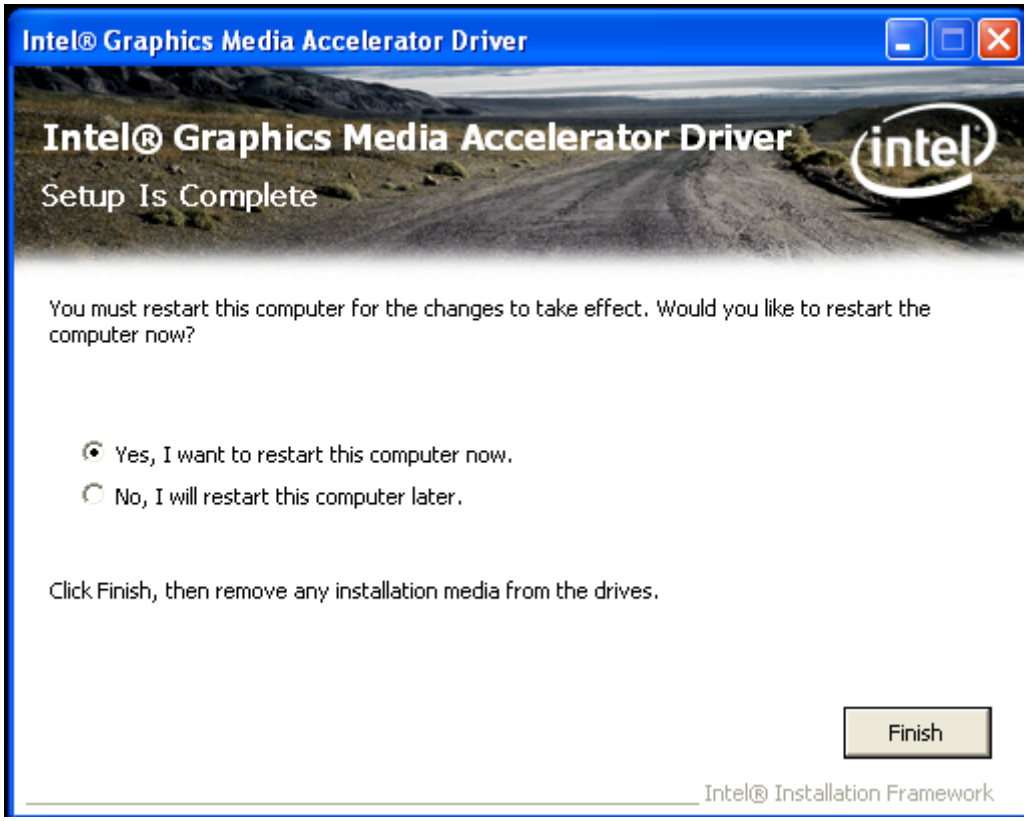
Intel® Graphics Media Accelerator Driver
Intel® Graphics Media Accelerator Driver
Setup Is Complete
You must restart this computer for the changes to take effect. Would you like to restart the computer now?
Yes, I want to restart this computer now.
No, I will restart this computer later.
Click Finish, then remove any installation media from the drives.
Finish
Intel® Installation Framework

Click FINISH; A Driver Installation Complete.

5.3 Realtek Gigabit LAN Driver

To install the Realtek Gigabit LAN connect device driver, please follow the steps below.

Select LAN from the list

Follow the step-by-step installation process to install the LAN driver.

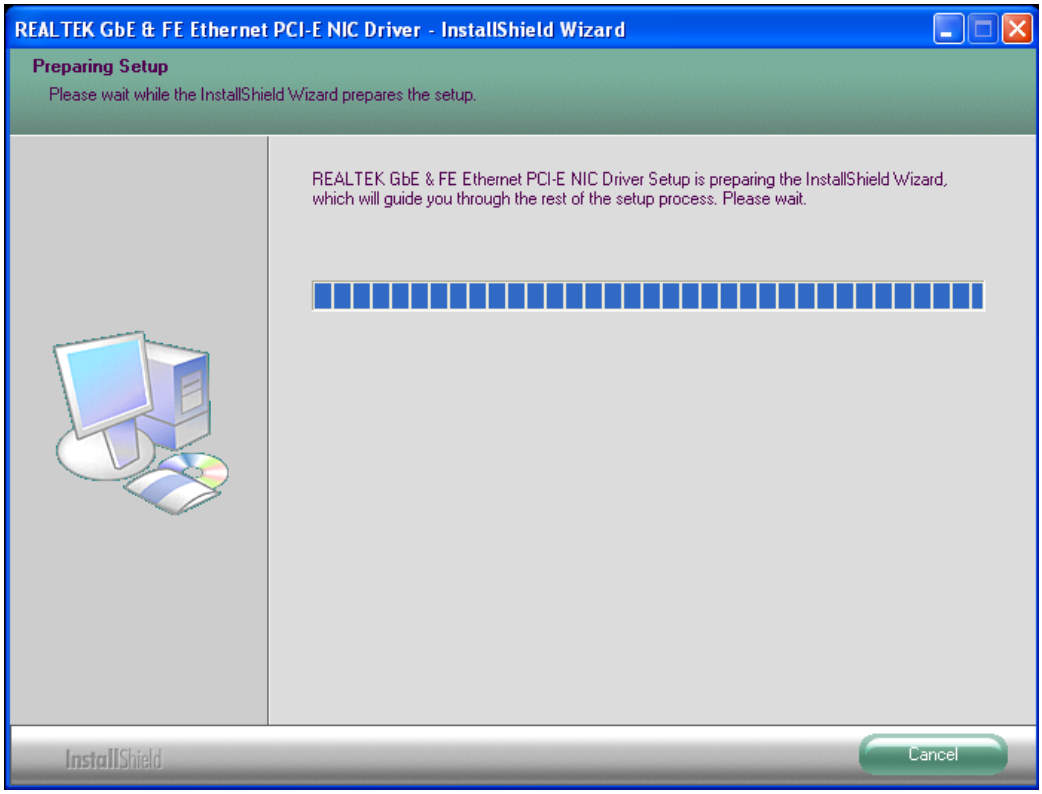
REALTEK GbE & FE Ethernet PCI-E NIC Driver - InstallShield Wizard
Preparing Setup
Please wait while the InstallShield Wizard prepares the setup.
REALTEK GbE & FE Ethernet PCI-E NIC Driver Setup is preparing the InstallShield Wizard, which will guide you through the rest of the setup process. Please wait.
InstallShield
Cancel

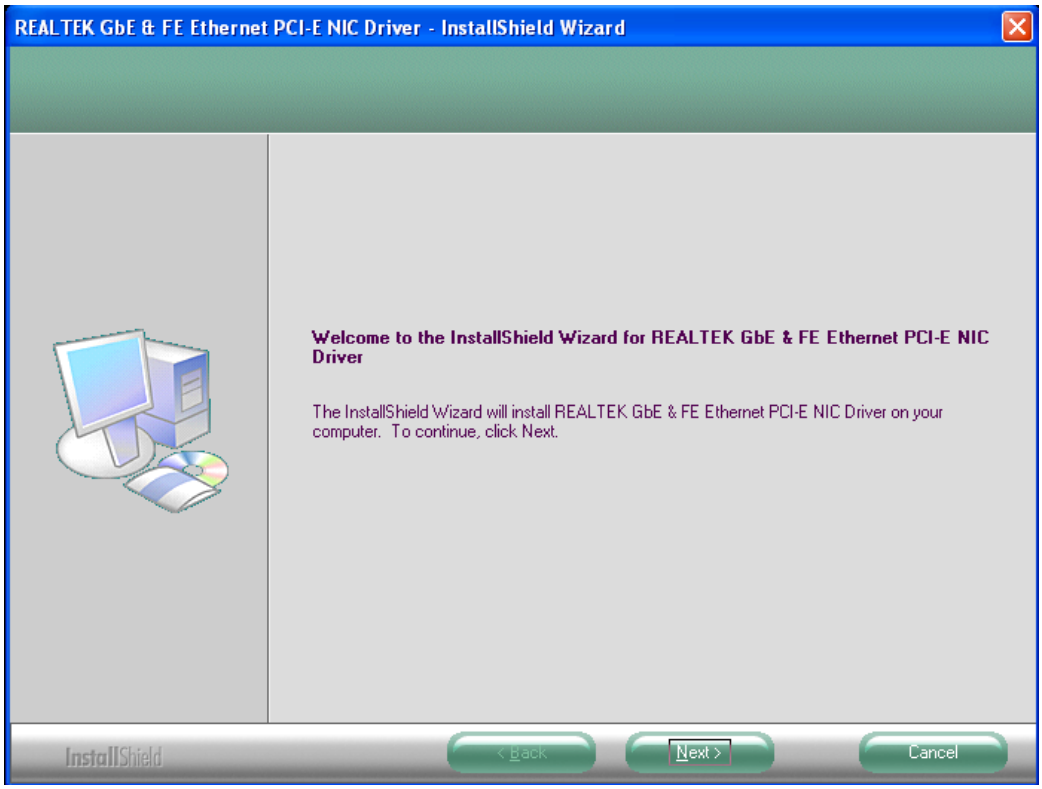
REALTEK GbE & FE Ethernet PCI-E NIC Driver - InstallShield Wizard
Welcome to the InstallShield Wizard for REALTEK GbE & FE Ethernet PCI-E NIC Driver
The InstallShield Wizard will install REALTEK GbE & FE Ethernet PCI-E NIC Driver on your computer. To continue, click Next.
InstallShield
< Back
Next >
Cancel

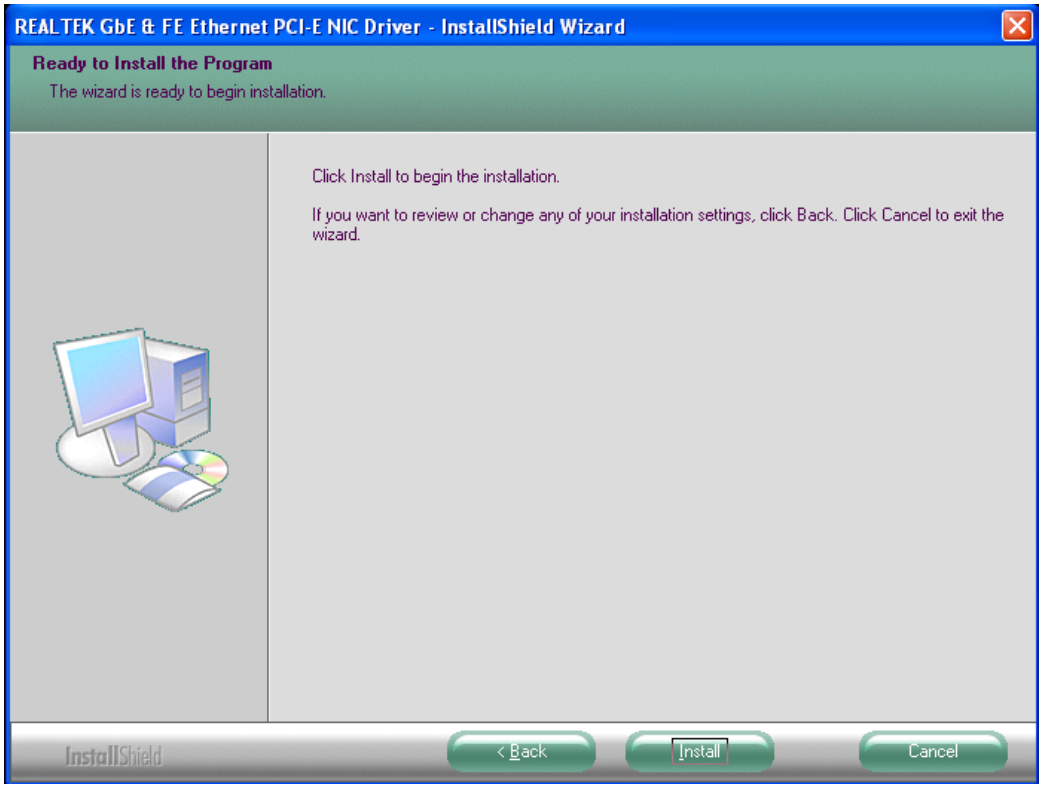
REALTEK GbE & FE Ethernet PCI-E NIC Driver - InstallShield Wizard
Ready to Install the Program
The wizard is ready to begin installation.
Click Install to begin the installation.
If you want to review or change any of your installation settings, click Back. Click Cancel to exit the wizard.
InstallShield
< Back
Install
Cancel

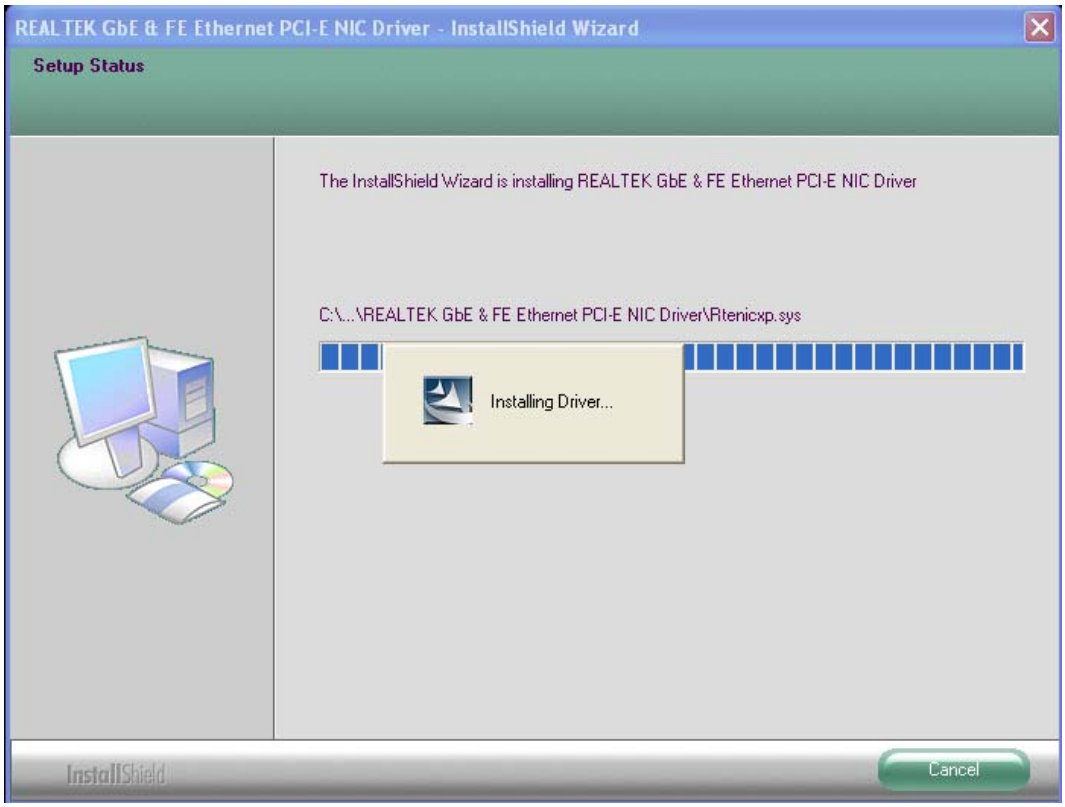
REALTEK GbE & FE Ethernet PCI-E NIC Driver - InstallShield Wizard
Setup Status
The InstallShield Wizard is installing REALTEK GbE & FE Ethernet PCI-E NIC Driver
C:\...\REALTEK GbE & FE Ethernet PCI-E NIC Driver\Rtenicxp.sys
Installing Driver...
InstallShield
Cancel

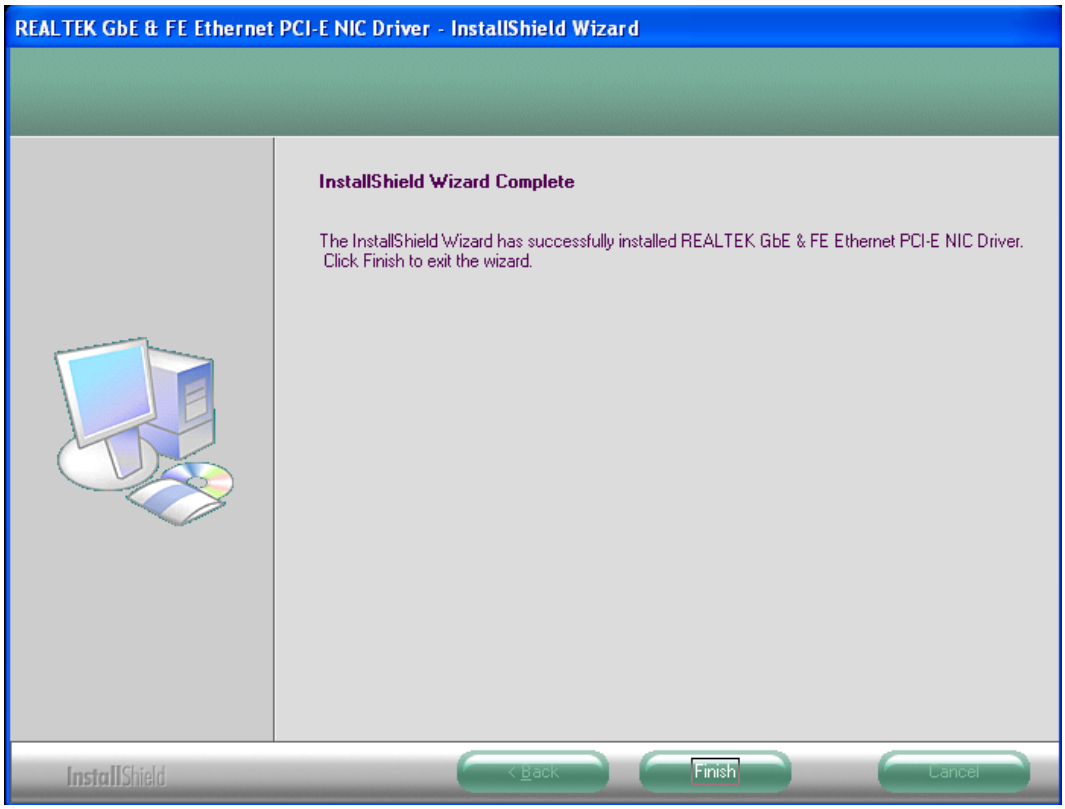
REALTEK GbE & FE Ethernet PCI-E NIC Driver - InstallShield Wizard
InstallShield Wizard Complete
The InstallShield Wizard has successfully installed REALTEK GbE & FE Ethernet PCI-E NIC Driver. Click Finish to exit the wizard.
InstallShield
< Back
Finish
Cancel

Click FINISH; A Driver Installation Complete.

5.4 Realtek HD Driver Installation

To install the Realtek HD Audio driver, please follow the steps below.

Select Audio from the list

Follow the step-by-step installation process to install the Realtek AC'97Audio driver.

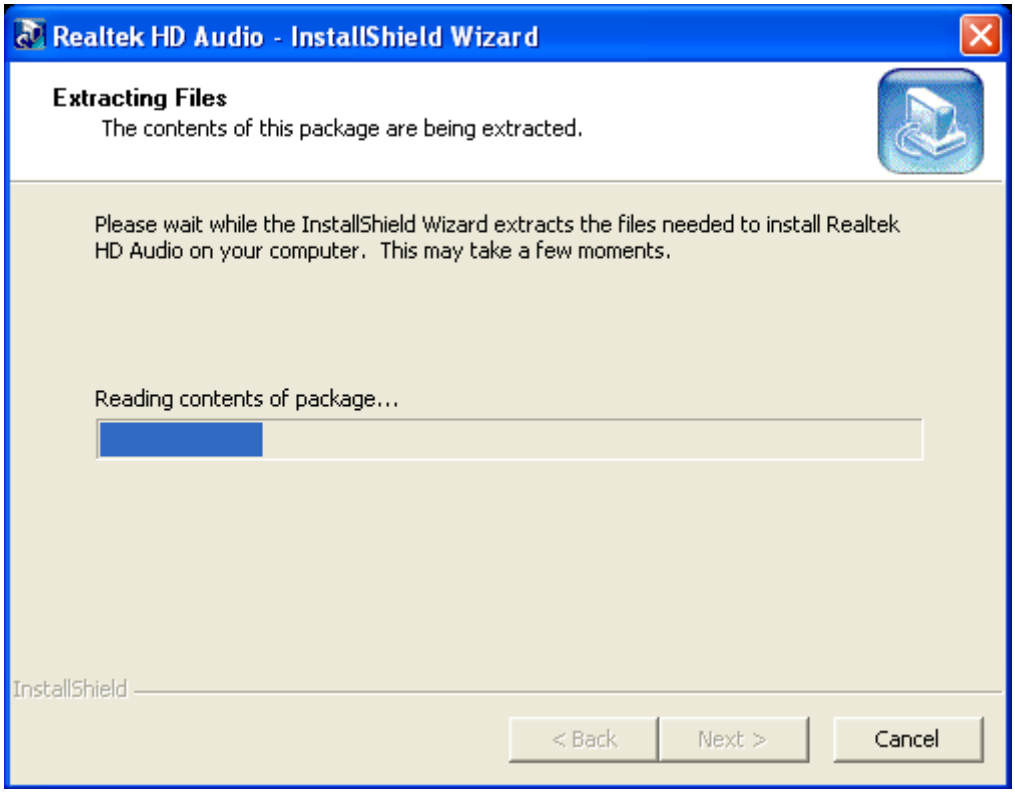
Realtek HD Audio - InstallShield Wizard
Extracting Files
The contents of this package are being extracted.
Please wait while the InstallShield Wizard extracts the files needed to install Realtek HD Audio on your computer. This may take a few moments.
Reading contents of package...
InstallShield
< Back
Next >
Cancel

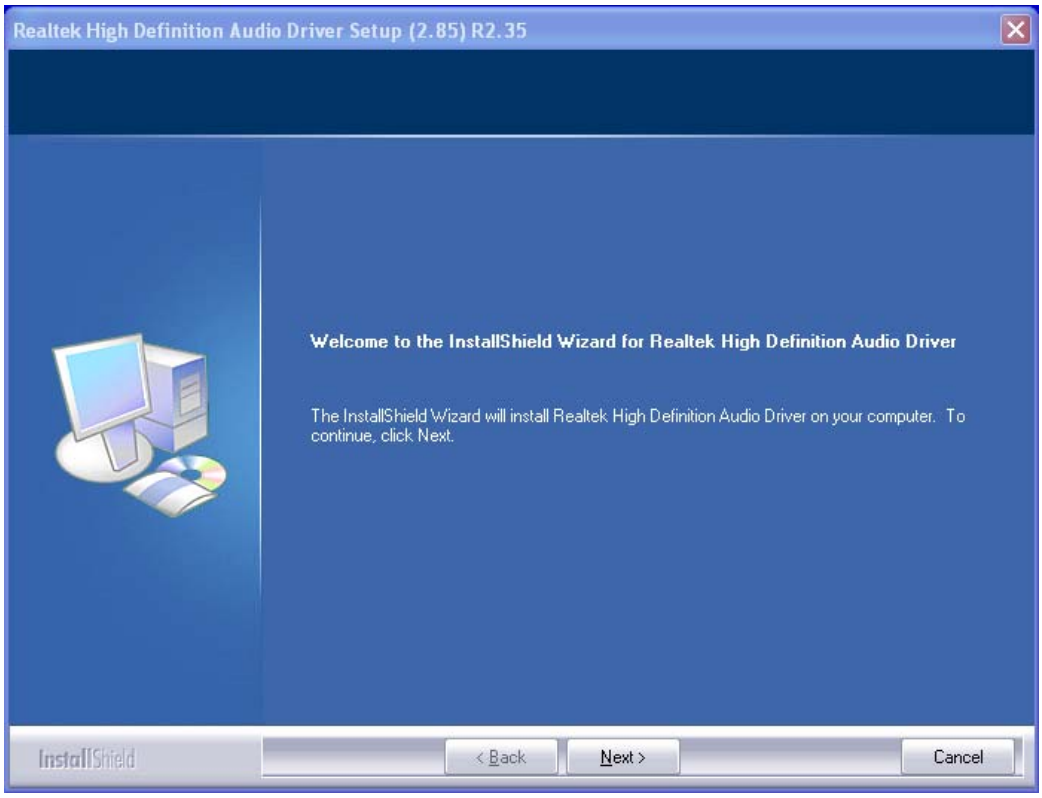
Realtek High Definition Audio Driver Setup (2.85) R2.35
Welcome to the InstallShield Wizard for Realtek High Definition Audio Driver
The InstallShield Wizard will install Realtek High Definition Audio Driver on your computer. To continue, click Next.
InstallShield
< Back
Next >
Cancel

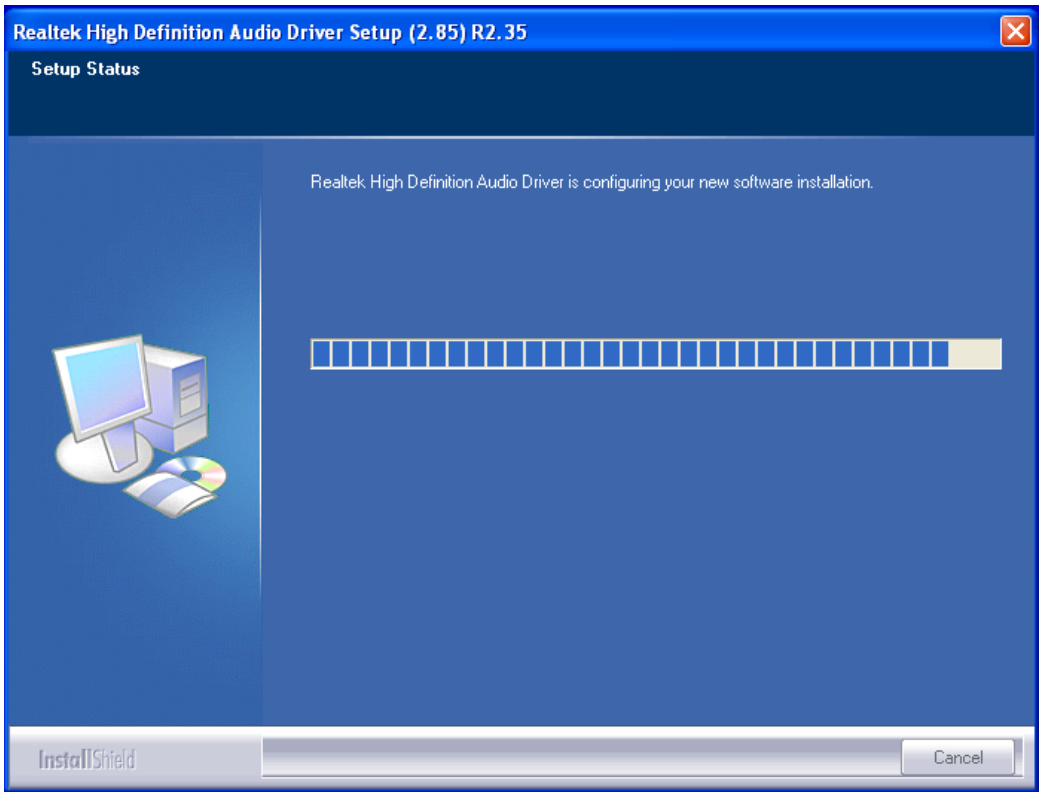
Realtek High Definition Audio Driver Setup (2.85) R2.35
Setup Status
Realtek High Definition Audio Driver is configuring your new software installation.
InstallShield
Cancel

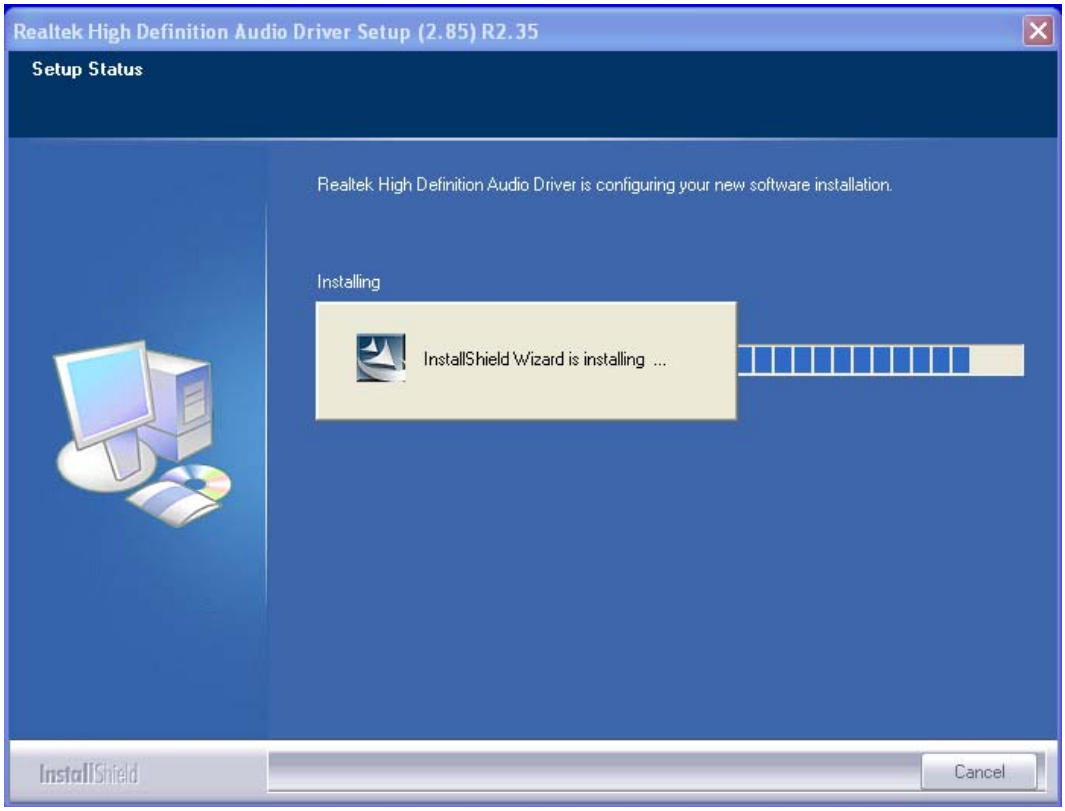
Realtek High Definition Audio Driver Setup (2.85) R2.35
Setup Status
Realtek High Definition Audio Driver is configuring your new software installation.
Installing
InstallShield Wizard is installing ...
InstallShield
Cancel

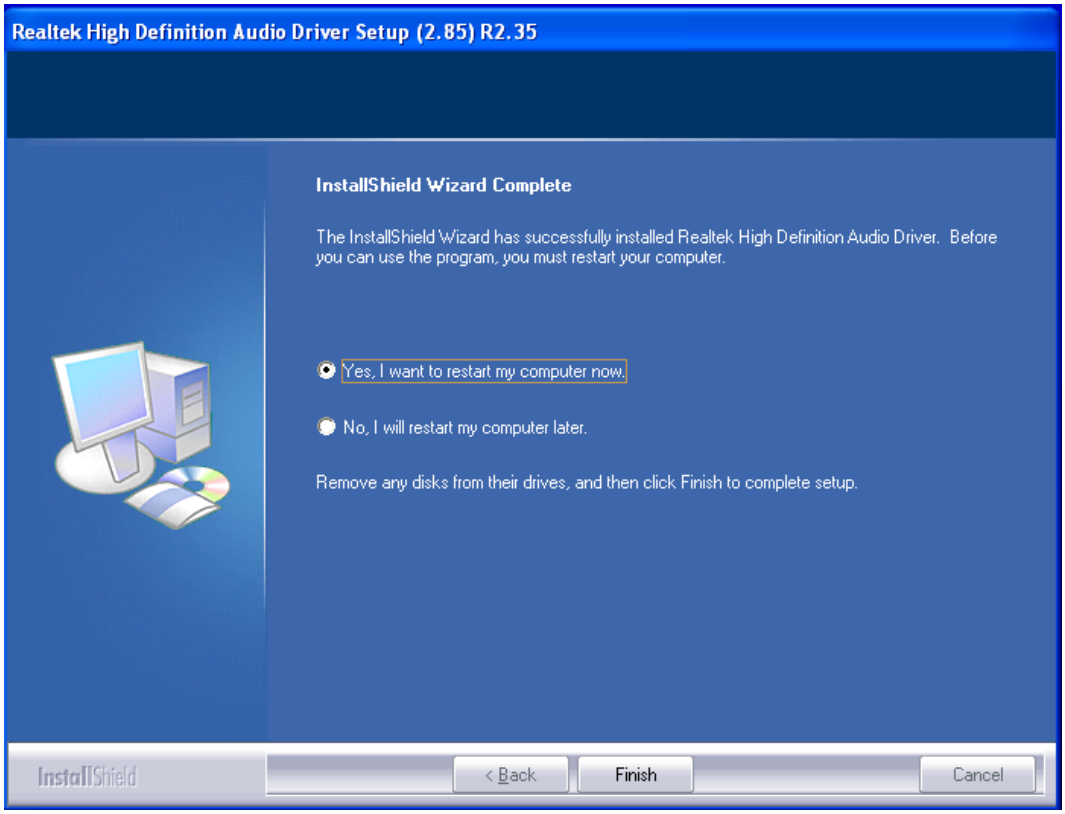
Realtek High Definition Audio Driver Setup (2.85) R2.35
InstallShield Wizard Complete
The InstallShield Wizard has successfully installed Realtek High Definition Audio Driver. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
Remove any disks from their drives, and then click Finish to complete setup.
InstallShield
< Back
Finish
Cancel

Click FINISH; Audio Driver Installation Complete.

Step 4: click "**Finish**" to complete the installation process.

**** 802.11b/g Wireless adapter, there is option.**

Chapter 6

6.1 Windows 2000/XP Driver Installation for Touch Screen

Before installing the Windows 2000/XP driver software, you must have the Windows 2000/XP system installed and running on your computer. You must also have the 9036 PenMount Serial Interface controller board installed. Contents of the PenMount Windows 2000/XP driver folder are listed below:

DMC9000.inf
DMC9000.sys
DMC9000.cat
SETUP.EXE

If you have an older version of the PenMount Windows 2000/XP driver installed in your system, please remove it first. Follow the steps below to install the PenMount Windows 2000/XP driver.

1. When the system first detects the controller board, a screen appears that shows “Unknown Device”. Do not use this hardware wizard. Press Cancel.

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
This wizard helps you install software for:
Unknown
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

2. Insert the PenMount Driver CD-ROM. Go to the Windows 2000-XP Driver folder. Click **setup.exe**.

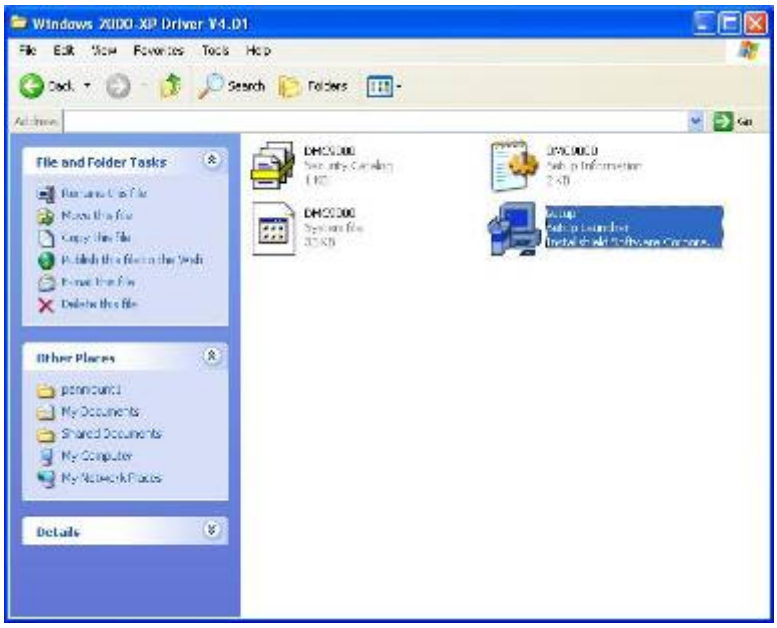

3. The screen displays the installation wizard for the PenMount software. Click “Next”.

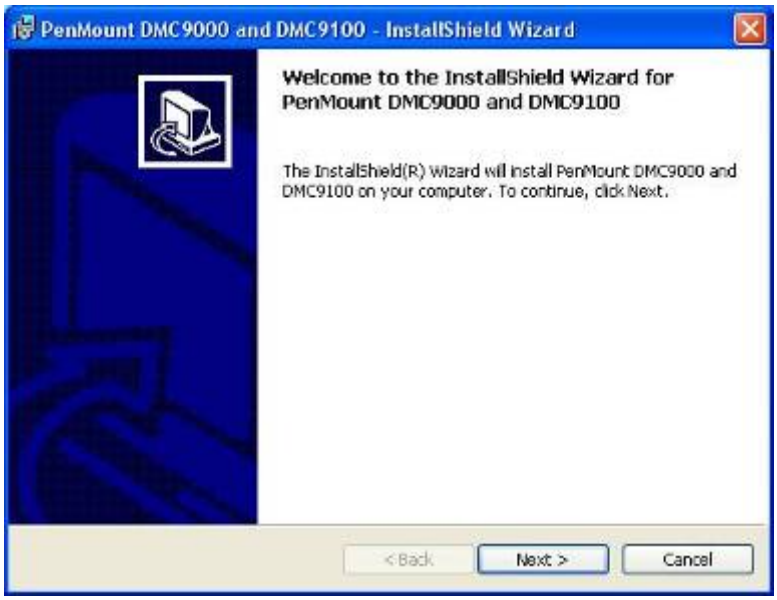
PenMount DMC9000 and DMC9100 - InstallShield Wizard
Welcome to the InstallShield Wizard for PenMount DMC9000 and DMC9100
The InstallShield(R) Wizard will install PenMount DMC9000 and DMC9100 on your computer. To continue, click Next.
< Back
Next >
Cancel

3. A License Agreement appears. Click “I accept…” and “Next”.

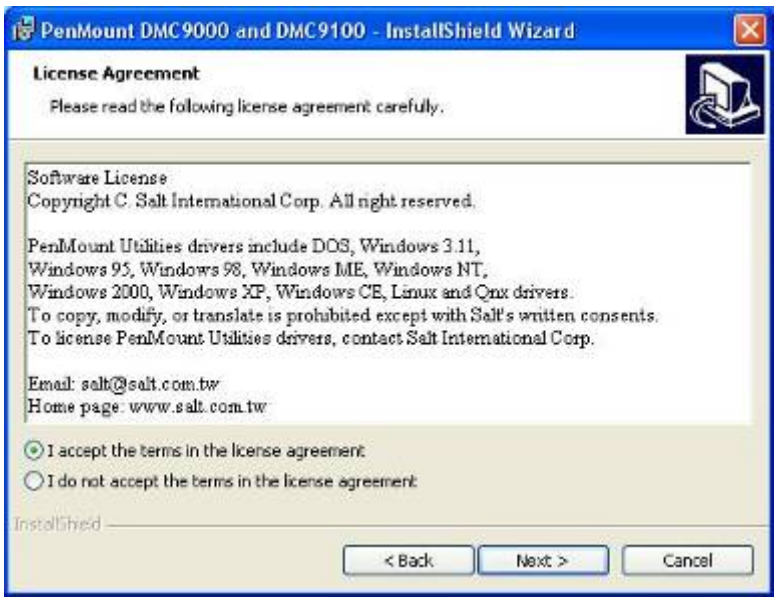
PenMount DMC9000 and DMC9100 - InstallShield Wizard
License Agreement
Please read the following license agreement carefully.
Software License
Copyright C Salt International Corp. All right reserved.
PenMount Utilities drivers include DOS, Windows 3.11,
Windows 95, Windows 98, Windows ME, Windows NT,
Windows 2000, Windows XP, Windows CE, Linux and Qnx drivers.
To copy, modify, or translate is prohibited except with Salt's written consents.
To license PenMount Utilities drivers, contact Salt International Corp.
Email: salt@salt.com.tw
Home page: www.salt.com.tw
I accept the terms in the license agreement
I do not accept the terms in the license agreement
InstallShield
< Back
Next >
Cancel

4. The “Ready to Install the Program” screen appears. Select “Install”.

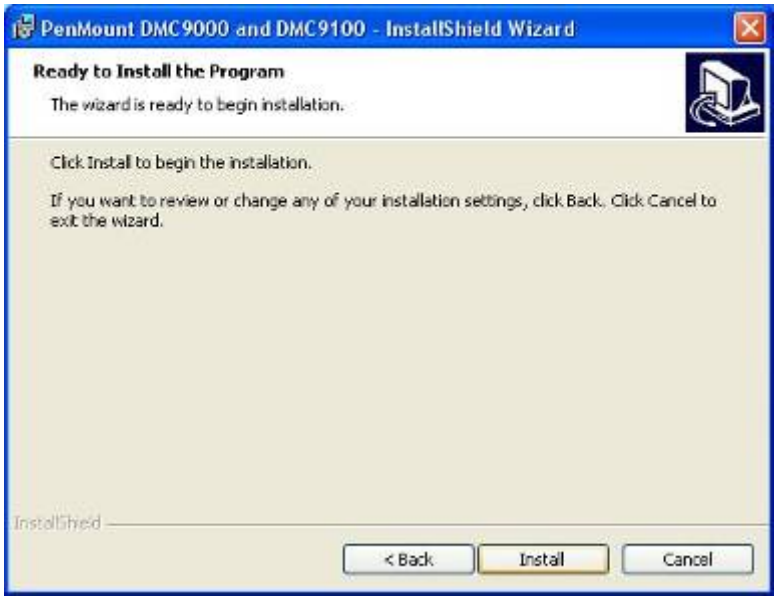
PenMount DMC9000 and DMC9100 - InstallShield Wizard
Ready to Install the Program
The wizard is ready to begin installation.
Click Install to begin the installation.
If you want to review or change any of your installation settings, click Back. Click Cancel to exit the wizard.
InstallShield
< Back
Install
Cancel

5. The next screen is “Hardware Installation”. Select “Continue Anyway”.

Hardware Installation
The software you are installing for this hardware:
PenMount DMC9000 and DMC9100
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

6. The “InstallShield Wizard Completed” appears. Click “Finish”.

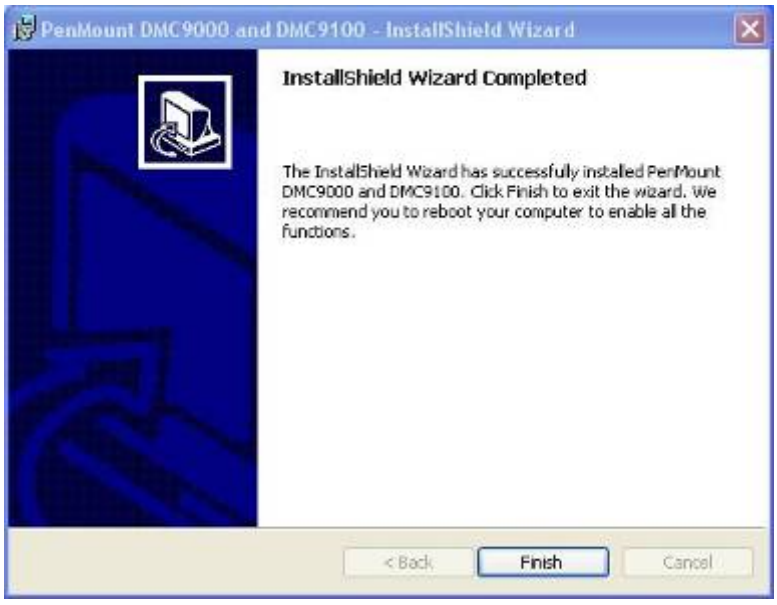
PenMount DMC9000 and DMC9100 - InstallShield Wizard
InstallShield Wizard Completed
The InstallShield Wizard has successfully installed PenMount DMC9000 and DMC9100. Click Finish to exit the wizard. We recommend you to reboot your computer to enable all the functions.
< Back
Finish
Cancel

6.2 Configuring the PenMount Windows 2000/XP Driver

Upon rebooting, the computer automatically finds the new 9036 controller board. The touch screen is connected but not calibrated. Follow the procedures below to carry out calibration.

1. After installation, click the PenMount Monitor icon “PM” in the menu bar.
2. When the PenMount Control Panel appears, click “Calibrate”.

PenMount Control Panel

The functions of the PenMount Control Panel are **Calibrate**, **Draw**, **Multiple Monitors**, **Option**, and **About**, which are explained in the following sections.

Calibrate

This function offers two ways to calibrate your touch screen. “Standard Calibration” adjusts most touch screens. “Advanced Calibration” adjusts aging touch screens.

Standard Calibration	**Click this button and arrows appear pointing to red squares. Use your finger or stylus to touch the red squares in sequence. After the fifth red point calibration is complete. To skip, press ‘ESC’.**
Advanced Calibration	**Advanced Calibration uses 4, 9, 16 or 25 points to effectively calibrate touch panel linearity of aged touch screens. Click this button and touch the red squares in sequence with a stylus. To skip, press ‘ESC’.**

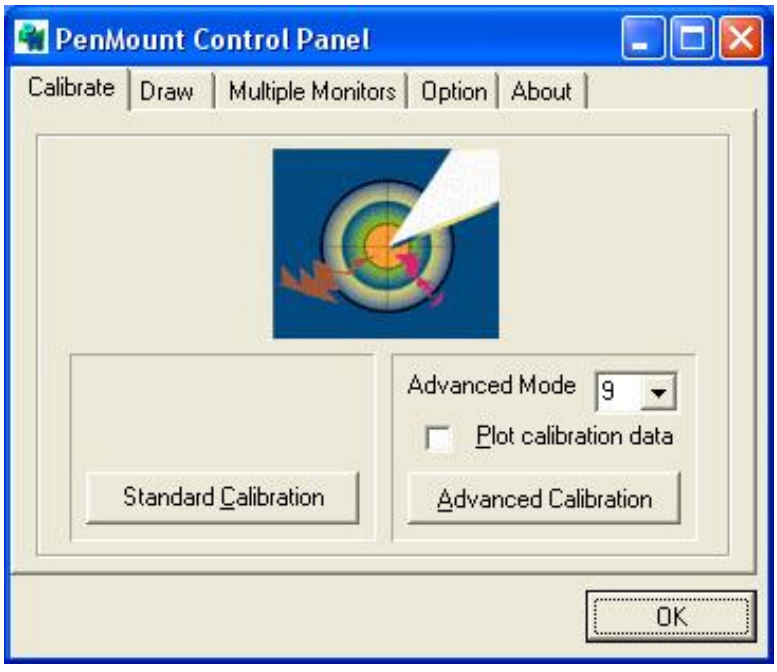

NOTE: The older the touch screen is, the more Advanced Mode calibration points you need for an accurate calibration. Use a stylus during Advanced Calibration for greater accuracy.

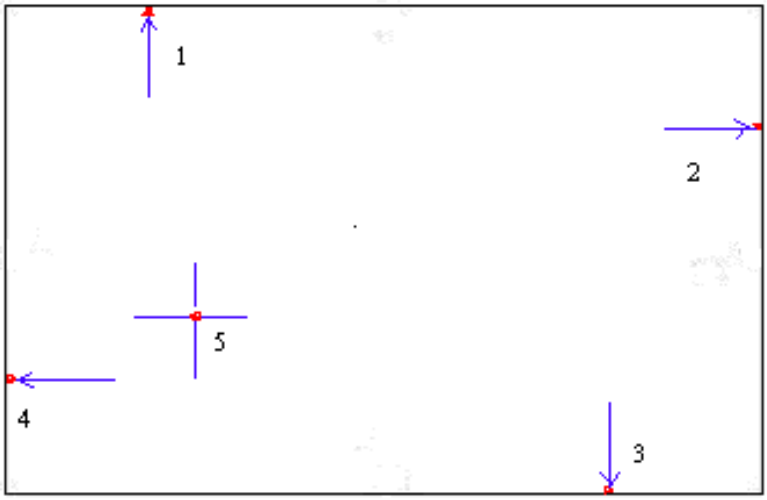

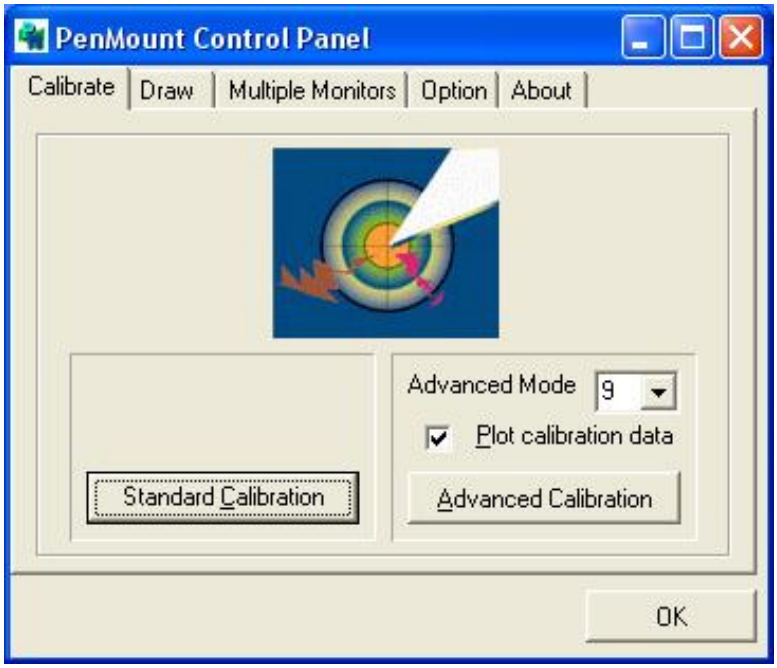

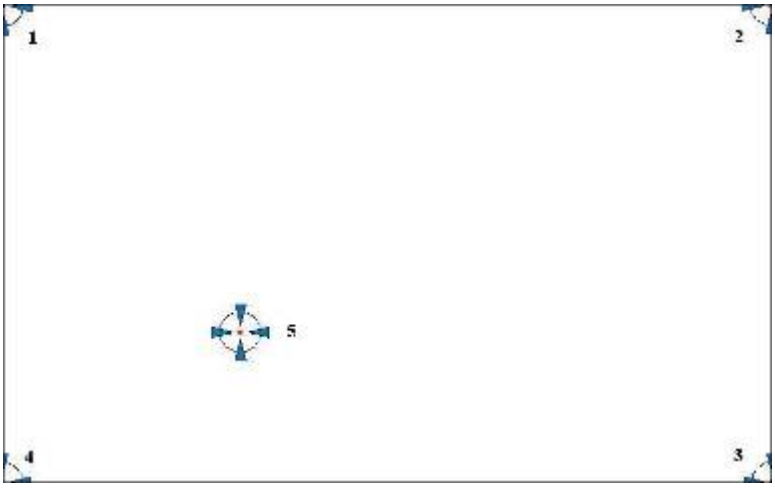

Plot Calibration Data **Check this function and a touch panel linearity comparison graph appears when you have finished Advanced Calibration. The blue lines show linearity before calibration and black lines show linearity after calibration.**

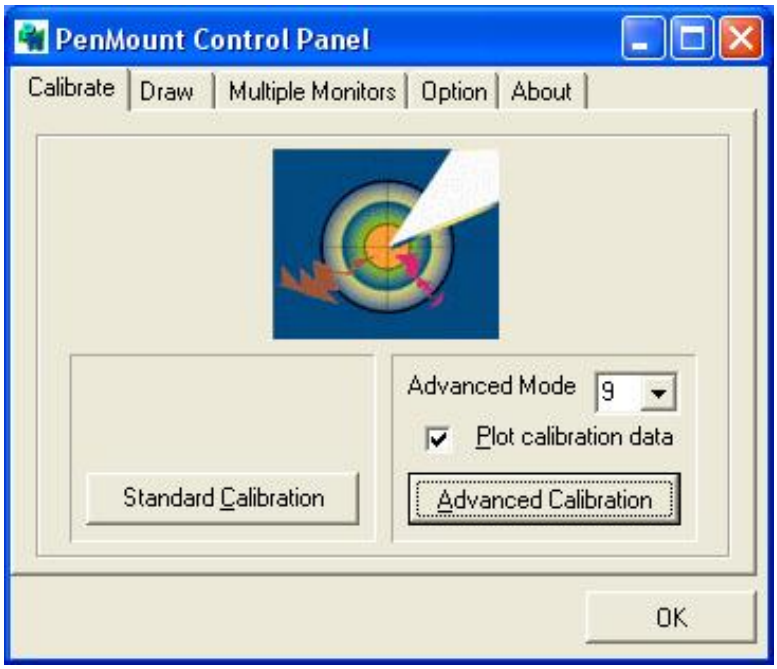

Draw

Tests or demonstrates the PenMount touch screen operation. The display shows touch location. Click **Draw** to start. Touch the screen with your finger or a stylus and the drawing screen will register touch activity such as **left**, **right**, **up**, **down**, **pen up**, and **pen down**.

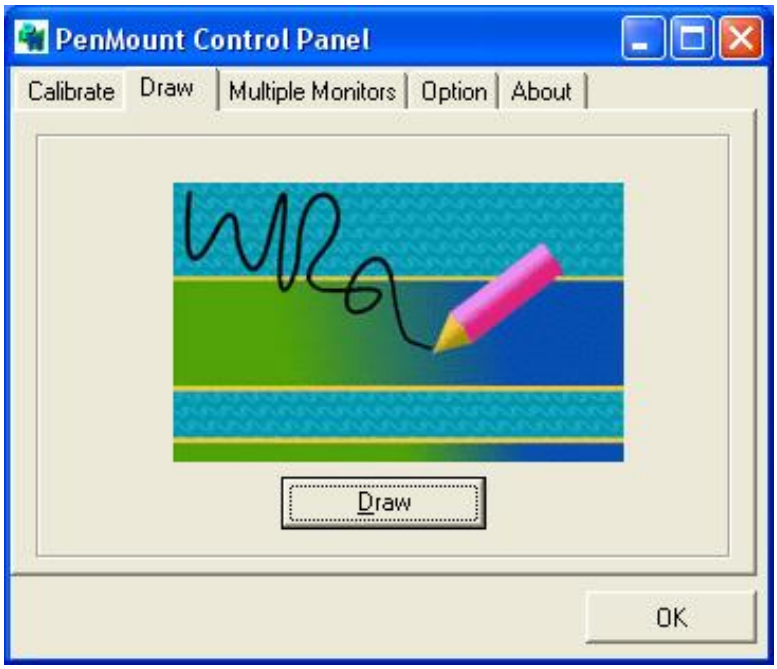

Touch the screen with your finger or a stylus and the drawing screen will register touch activity such as **left**, **right**, **up**, **down**, **pen up**, and **pen down**.

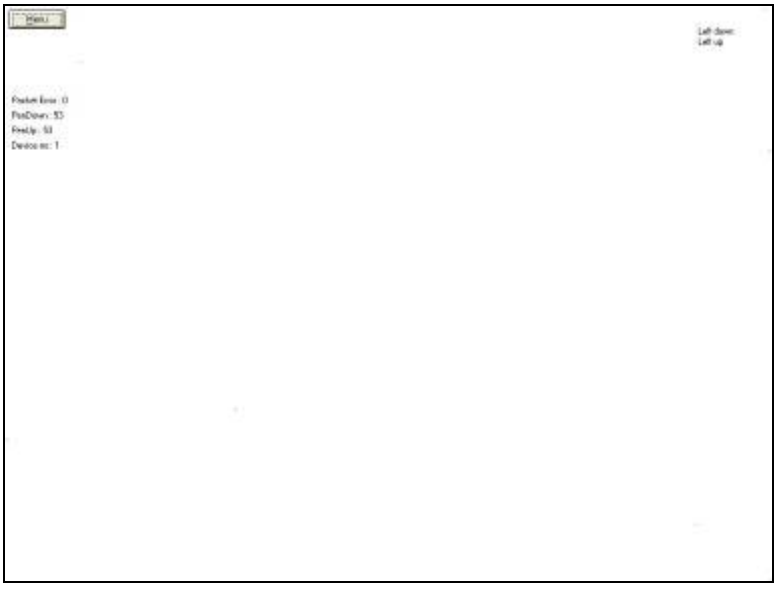

Click Clear Screen to clear the drawing.

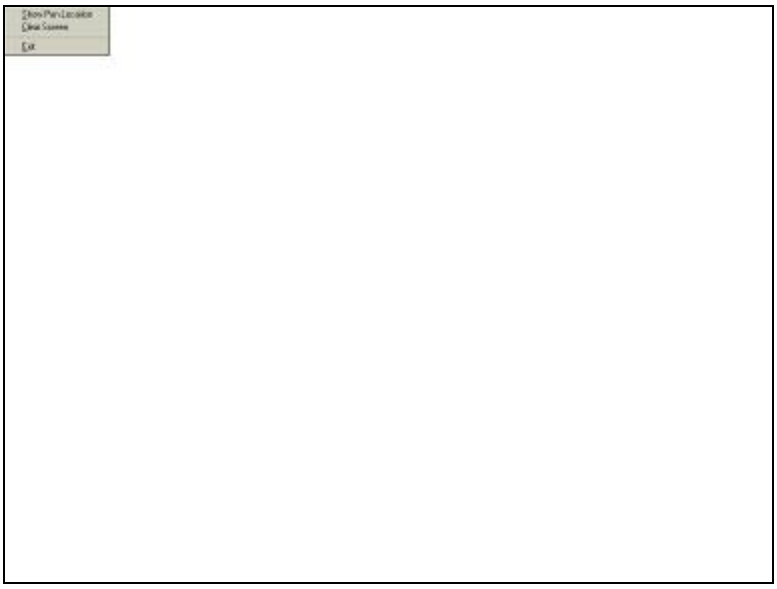

About

This panel displays information about the PenMount controller and this driver version.

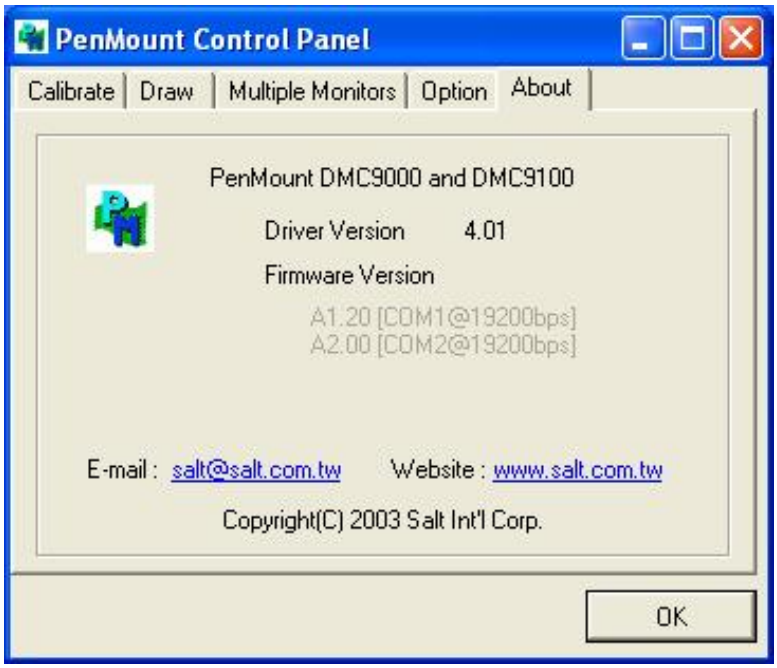

PenMount Monitor Menu Icon

The PenMount monitor icon (PM) appears in the menu bar of Windows 2000/XP system when you turn on the PenMount Monitor in the PenMount Utilities.

The PenMount Monitor has the following functions:

Beep	**Turns beep on or off.**
Right Button	**When you select this function, a mouse icon appears in the right-bottom of the screen. Click this icon to switch between Right and Left** **Button functions.**
Pen Stabilizer	**Check this function to reduce cursor vibration for relatively unstable touch screens, or where there may be excess vibration. Normally this function is not checked.**
Exit	**Exits the PenMount Monitor function.**

PenMount Rotation Functions

The PenMount driver for Windows 2000/XP supports several display rotating software packages. The PenMount drivers for Windows 95, Windows 98/ME, Windows 2000/XP, as well as Windows 98 USB and Windows Me/2000/XP support display rotating software packages such as:

- Portrait's Pivot Screen Rotation Software
- ATI Display Driver Rotating Function
- nVidia Display Driver Rotating Function
- SMI Display Driver Rotating Function
- Intel 845G/GE Display Driver Rotating Function

Configuring the Rotation Function

1. Install the rotation software package.
2. Choose the rotating function (0°, 90°, 180°, 270°) in the 3rd party software. The calibration screen appears automatically. Touch this point and rotation is mapped.

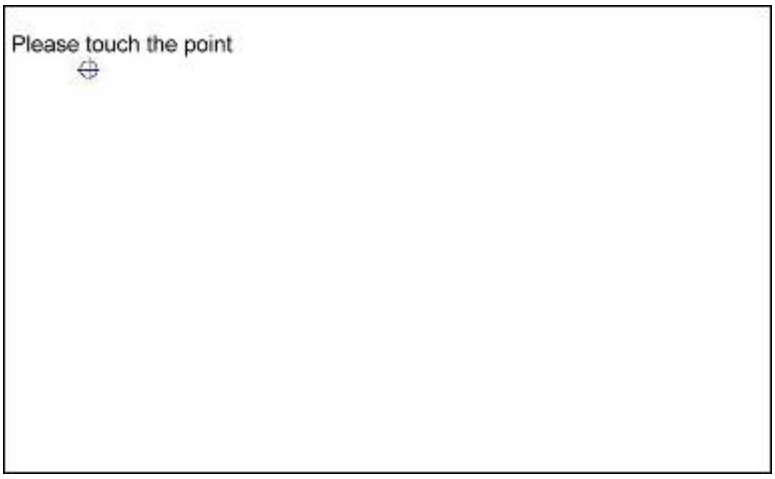

NOTE: The rotating function is disabled if you use Monitor Mapping

6.3 Uninstall the PenMount Windows 2000/XP Driver

1. Exit the PenMount monitor (PM) in the menu bar.
2. Go to **Settings**, then **Control Panel**, and then click **Add/Remove program**. Select **PenMount DMC9000** and click the **Add/Remove** button.

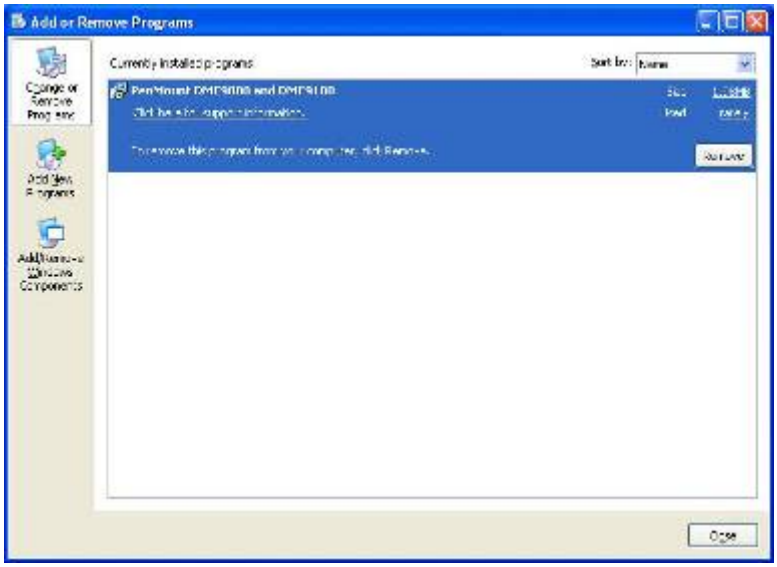

3. Select **PenMount DMC9000 and DMC9100**. Click the **Remove** button.

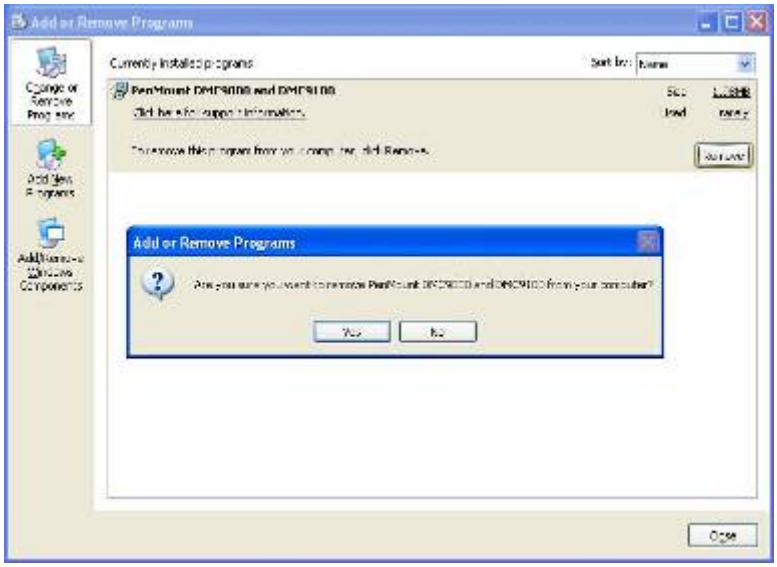

4. Select “Yes” and “Close” to remove the PenMount Windows 2000/XP driver, and reboot the system.

Appendix

VESA Mounting

The APC-3x8x display monitor is mounted by means of VESA. Just carefully mount the arm onto the rear of the unit by fastening the given four screws as shown in Figure A.

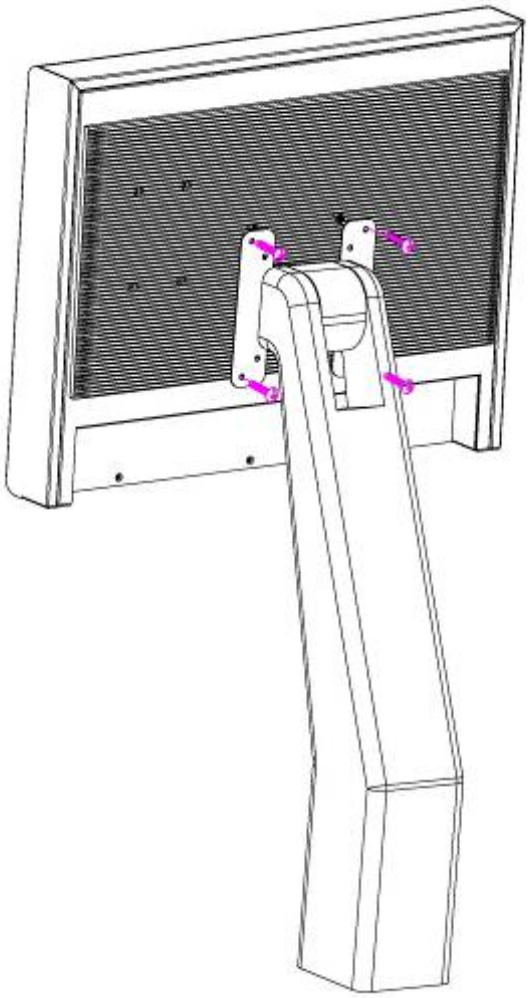

Figure A: VESA Mounting of the APC-3x8x